AUSTRALIA

AERONAUTICAL INFORMATION CIRCULAR (AIC)

AERONAUTICAL INFORMATION SERVICE, AIRSERVICES AUSTRALIA, GPO BOX 367, CANBERRA ACT 2601

H54/26

Effective: 202611090400 UTC

For DISTRIBUTION queries, contact:
Email: aim.editorial@airservicesaustralia.com

For CONTENT queries regarding this AIC, contact:
Email: chris.young@bne.com.au

BRISBANE AERODROME (YBBN) RUNWAY UPGRADES PROGRAMME, RWY 01R/19L AND RWY 01L/19R

1. INTRODUCTION

1.1 This AIC cancels and replaces AIC H41/26 with a change to para 3.2.

1.2 This AIC provides notification to aircraft and ground operations of planned closures of runways at Brisbane Aerodrome (RWY 01R/19L and RWY 01L/19R) to facilitate works associated with the Brisbane Aerodrome Runways Upgrade Programme. This program of works is essential to maintain serviceability of both runways at Brisbane Aerodrome.

1.3 The works include pavement, aeronautical ground lighting electrical works and operational maintenance.

1.4 For detailed information surrounding these works and associated impacts to aircraft operations, refer to the below Method Of Working Plans (MOWP):

MOWP Scope	MOWP #	Approximate Works Commencement
Western Runway Surface Regrade	YBBN 26/04	August 2026
Eastern Runway Early Works	YBBN 26/05	August 2026

1.5 The actual date and time of works will be advised by a NOTAM.

2. PROGRAMME STAGING

2.1 2026 Phase 1 Enabling Works

2.1.1 The Western Runway Surface Regrade Works scope includes:

- Construction of three large asphalt patches on Runway 01L/19R
- Lift and reinstatement of Aeronautical Ground Lighting (runway centreline, runway edge and taxiway lead on/off lights)
- Grooving of the asphalt patches will be completed minimum eight (8) weeks after the patches are constructed. NOTAMs will be in effect relating to un-grooved surfaces from approximately August 2026 to December 2026.

2.1.2 The Eastern Runway Early Works scope includes:

- Construction of two large asphalt patches at the Runway 19L touch down zone.
- Construction of a small patch on Taxiway A7 (inside the Runway 01R/19L runway strip).
- Lift and reinstatement of Aeronautical Ground Lighting (Taxiway A7 lead in/off lights).
- Grooving of the asphalt patches will be completed minimum eight weeks after the patches are constructed. NOTAMs will be in effect relating to ungrooved surfaces from approximately August 2026 to December 2026.
- Survey and service identification works.

3. OPERATIONAL IMPACT

3.1 The Western Runway Surface Regrade Works requires Runway 01L/19R and associated taxiways (150M west of Taxiway Y3) to be unavailable as follows:

- Night closures for survey works.
- Weekend closures for asphalt patch works.
- Night closures for grooving works.

3.2 The Eastern Runway Early Works requires Runway 01R/19L and associated taxiways (150M west of Taxiway A) to be unavailable as follows:

- Day and night closures for survey and service investigation works.
- Day and night closures for asphalt patch works.
- Night closures for grooving works.

3.3 **A minimum of one parallel runway will be available at all times.**

3.4 More specific dates for each closure will be communicated via MOWP and NOTAM.

4. TECHNICAL QUESTIONS AND ADVICE

4.1 Further information or clarification pertaining to this advice may be obtained by contacting Brisbane Airport Corporation Pty Ltd.

Chris Young

Manager of Airside Standards

PH: +61 (07) 3406 3169

Email: chris.young@bne.com.au

5. CANCELLATION

5.1 This AIC will be cancelled when works are completed.

6. DISTRIBUTION


6.1 Airservices Australia website only.

Appendix

1. 2026 Phase 1 Enabling Works Diagram

1. 2026 Phase 1 Enabling Works Diagram

Appendix 1 to AIC H54/26

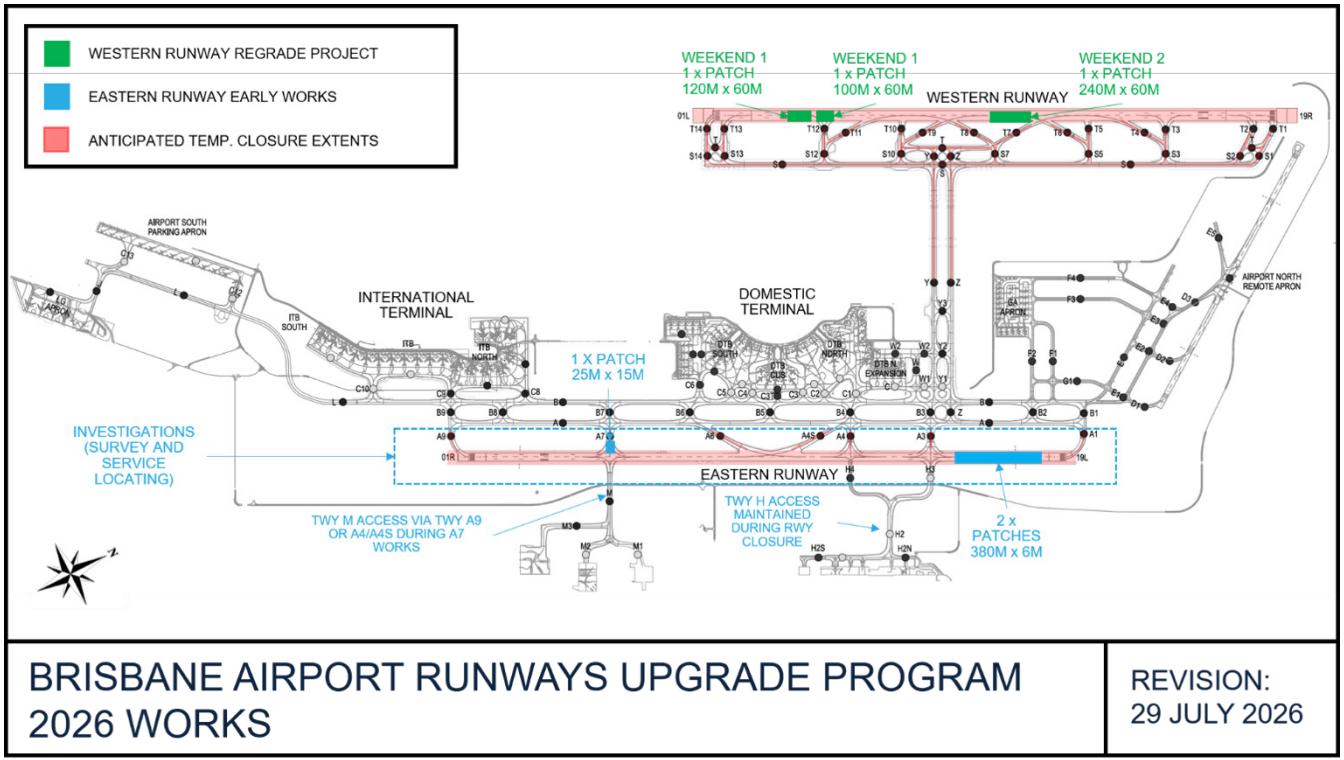

BRISBANE AIRPORT RUNWAYS UPGRADE PROGRAM
2026 WORKS

REVISION:
29 JULY 2026