

**STANDARD INSTRUMENT ARRIVAL (STAR)
RIKAB SEVEN VICTOR ARRIVAL (RNAV)
ADELAIDE, SA (YPAD)**

1 MAR 2018


ATIS 116.4 134.5	APP 124.2	TWR 120.5	SMC 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	--------------	--

NOT TO SCALE



ATC APCH SPEEDS	
NM FM TD	SPEED KT
RWY 05 ANGAV	185 -160
RWY 23 10NM	185 -160
5	160 -150

**SPEED
MAX IAS 2500KT
BELOW 10,000FT**

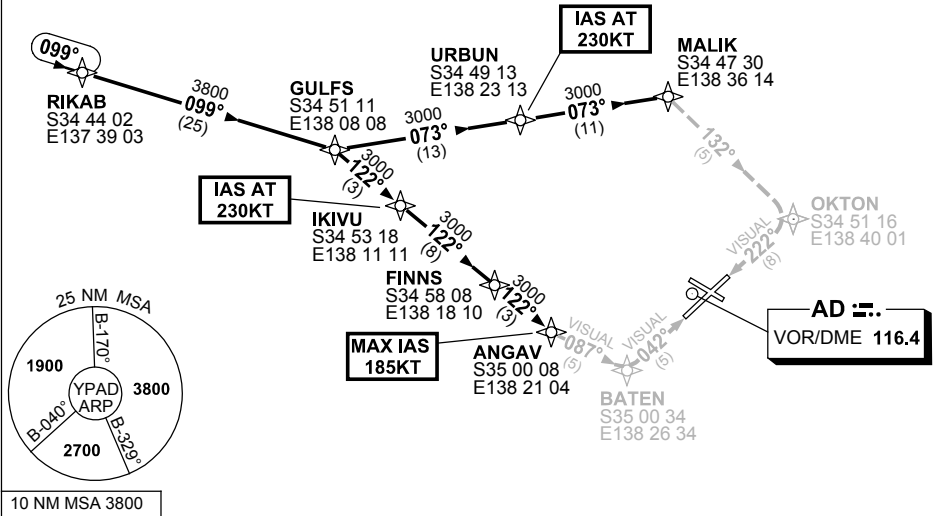

ARRIVAL: RIKAB SEVEN

RWY 05 VICTOR:

- Track 099° to GULFS
- Turn RIGHT, track 122° to IKIVU
IAS AT 230KT from IKIVU
- Track 122° to FINNS
- Track 122° to ANGAV
MAX IAS 185KT from ANGAV
- Turn LEFT, track 087° VISUAL to BATEN
- Turn LEFT, intercept VISUAL final RWY 05

RWY 23 VICTOR: (HJ ONLY)

- Track 099° to GULFS
- Turn LEFT, track 073° to URBUN
IAS AT 230KT from URBUN
- Track 073° to MALIK
- Turn RIGHT, track 132° VISUAL to OKTON
- Turn RIGHT, intercept VISUAL final RWY 23

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

IF ABLE CTC AD APP 08-8238-7992

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: MSA.

PADSR29-154