USE QNH

NDB RWY 24

BALLINA/BYRON GATEWAY, NSW (YBNA)

ATIS	AWIS	APP/DEP	TWR	FIA (AH)	CTAF+AFRU (AH)	PAL+AA
128.65	134.8	118.35	124.2	BN CEN 120.3	124.2	121.3

Bearings are Magnetic
Elevations in FEET AMSL

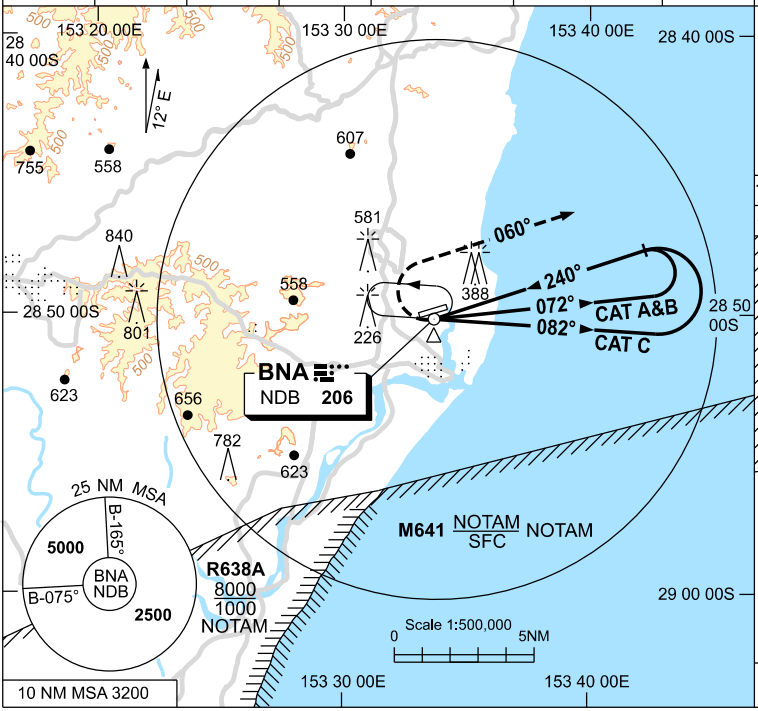

Holding at BNA NDB



TR IN	TURN	TIME	MIN ALT	DME LMT
082°	Left	1	2500	



AD ELEV 7

DME DIST				NOT APPLICABLE							
ALT											

MISSED APPROACH:
TURN RIGHT,
TRACK 060°.
CLIMB TO 2500ft OR
AS INSTRUCTED BY ATC.

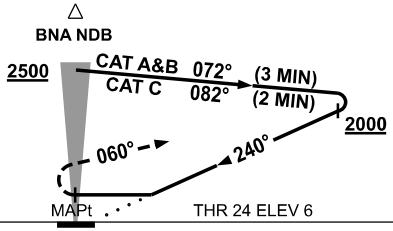

NOTES

1. MAX IAS:
   HOLDING : 195KT.
   INITIAL : 195KT.
   MISSED APCH
   TURN : 180KT.
2. *NO CIRCLING NORTH OF RWY 06 / 24.
3. PROC PARTIALLY IN NON-CONTROLLED AIRSPACE
4. **COLOUR** : SEE SPEC NOTICES.

CATEGORY	A	B	C	D
S-I NDB	**790** (783-4.5)			NOT APPLICABLE
CIRCLING *	**790** (783-2.4)		**1030** (1023-4.0)	
ALTERNATE	(1283-4.4)		(1523-6.0)	

Changes: Editorial, FREQ.

BNANB01-187

© Airservices Australia

airservices australia