

NDB RWY 24
EMERALD, QLD (YEML)

AWIS 132.95	FIA BN CEN 122.3	CTAF+AFR 126.7	PAL+AA 120.6
------------------------------	-----------------------------------	---------------------------------	-------------------------------

148 00 00E 148 10 00E 148 20 00E

23 30 00S

The map shows a central area with several navigation aids and bearings:

- EML NDB 324** (Morse code: $\cdot\cdot\cdot\cdot$)
- CAT A&B** (Bearing: 083°)
- CAT C&D** (Bearing: 095°)
- 910** (Bearing: 251°)
- 748** (Bearing: 251°)
- 790** (Bearing: 251°)
- 764** (Bearing: 251°)
- 1017** (Bearing: 251°)
- 697** (Bearing: 251°)

Holding at EML NDB

Bearings are Magnetic Elevations in FEET AMSL

TR IN	TURN	TIME	MIN ALT	DME LMT
095°	Left	1	3300	

Scale 1:500,000 5NM

10 NM MSA 2100


25 NM MSA 3300

EML NDB

AD ELEV 622

[illegible]

TRACK 251°. CLIMB TO 3300FT.

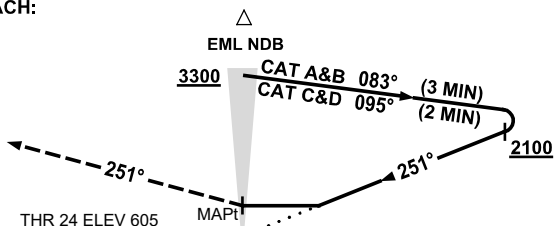

1. MAX IAS:
INITIAL :
CAT C&D 210KT.

CATEGORY	A	B	C	D
S-I NDB	1320 (715-4.1)			
CIRCLING	1420 (798-2.4)		1520 (898-4.0)	1520 (898-5.0)
ALTERNATE	(1298-4.4)		(1398-6.0)	(1398-7.0)

EMLNB01-171