

ILS-Y or LOC-Y RWY 12
HOBART, TAS (YMHB)

ATIS 112.7 128.45 **AWIS** 122.375 **SMC** 121.7 **TWR** 118.1 **HB APP/FIA (AH)** 118.1 **CTAF+AFRU (AH)** 118.1 **AFRU+PAL (AH)** 118.1

NAVAID RQ:
• DME or GNSS


Holding at BUSKA

TR TURN TIME MIN ALT DME LMT
120° Right 1 4200

AD ELEV 13
Bearings are Magnetic
Elevations in FEET AMSL

NM TO HB DME	13.4	13	12.1	11	10	8.9	8	6.9	5	4.3	3	2	1.9		
ALT (3° APCH PATH)	4200	4070	3780	3430	3110	2750	2480	2120	1520	1300	880	560	540		

GNSS permitted in lieu of DME
Reference waypoint HB VOR

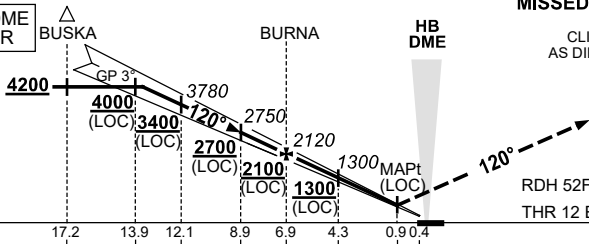

MISSED APPROACH:
TRACK 120°. CLIMB TO 4000ft OR AS DIRECTED BY ATC.

RDH 52FT
THR 12 ELEV 12

NM TO HB DME	17.2	13.9	12.1	8.9	6.9	4.3	0.904
NM TO THR 12	16.7	13.4	11.6	8.4	6.4	3.9	0.50

NOTES

NOTES

1. MAX IAS:
HOLDING : 200KT.
- * 2. NO CIRCLING WEST
OF RWY 12 / 30.
- #3. MIN MAP GRAD
ILS 4.2%,
MIN MAP GRAD
LOC 3.9%
CTA CONTAINMENT.
4. **COLOUR:** SEE
SPEC NOTICES.

CATEGORY	A	B	C	D
S-I ILS #	320 (308) 0.8			
S-I LOC#	540 (527-2.1)			
CIRCLING*	720 (707-2.0)	1240 (1227-2.4)	1530 (1517-4.0)	1600 (1587-5.0)
ALTERNATE	(1207-4.0)	(1727-4.4)	(2017-6.0)	(2087-7.0)

Changes: S-I LOC. CAT A CIRCLING.

MHBII01-183