



USE QNH

VOR RWY 14R
LAUNCESTON, TAS (YMLT)


1 DEC 2022

ATIS 112.6 (TWR HR) 134.75 (H24)	AWIS (AH) 112.6	TWR 118.7	LT APP/FIA (AH) ML CEN 123.8	CTAF+AFRU (AH) 118.7	AFRU+PAL (AH) 118.7
--	--------------------	--------------	---------------------------------	-------------------------	------------------------


NAVAID RQ:
 • DME

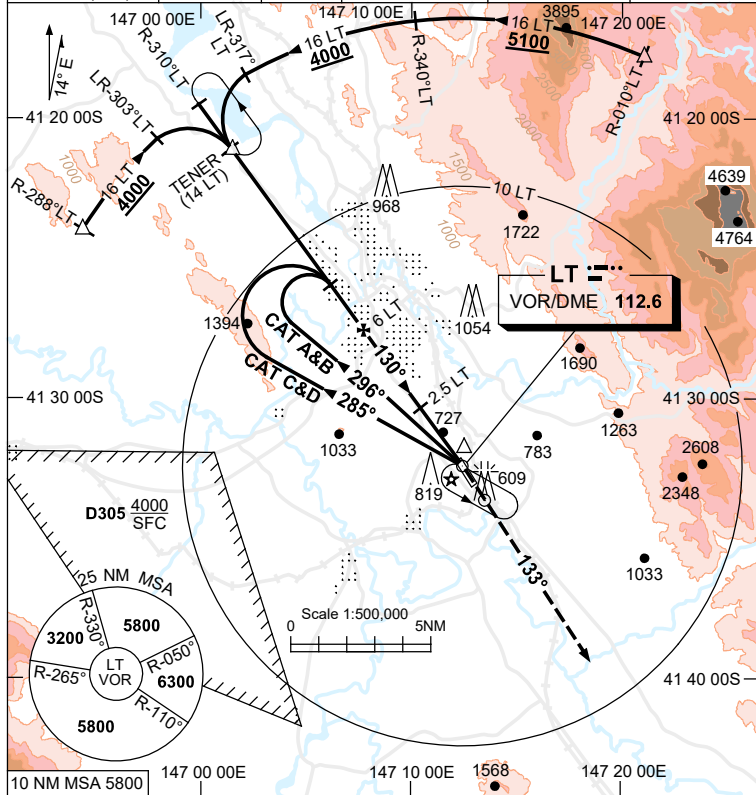

TR IN	TURN	TIME	MIN ALT	DME LMT
130°	Left	1	4000	




TR IN	TURN	TIME	MIN ALT	DME LMT
285°	Left	1	4000	



AD ELEV 562
 Bearings are Magnetic Elevations in FEET AMSL

DIST TO LT DME	13.9	13	12	11	10.7	10	9	8	7	6	5	4	2.9	2.4
ALT(3.16° APCH PATH)	5100	4780	4440	4110	4000	3780	3440	3100	2770	2430	2100	1760	1390	1240

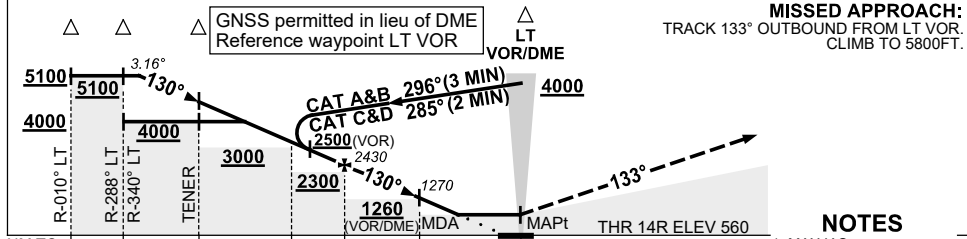

NOTES

- MAX IAS: INITIAL : 180KT. HLDG AT LT VOR: 195KT. HLDG AT LT R-310°/14: 220KT.
- SPECIAL ALT MNM 1000/5.0KM.
- COLOUR: SEE SPEC NOTICES.
- HOLDING AT TENER NOT CONTAINED IN CTA.

CATEGORY	A	B	C	D
S-I VOR/DME		1240 (678-3.8)		
S-I VOR		1390 (828-4.7)		
CIRCLING	1440 (878-2.4)		1670 (1108-4.0)	1670 (1108-5.0)
ALTERNATE*	(1378-4.4)		(1608-6.0)	(1608-7.0)

Changes: FROM SUP H64/22 AND SUP H37/22.

MLTV001-173