


STANDARD INSTRUMENT ARRIVAL (STAR)
INTOG ONE VICTOR ARRIVAL (RNAV)
ADELAIDE, SA (YPAD)

28 NOV 2024

ATIS 116.4 134.5	APP 118.2	TWR 120.5	SMC 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------	--------------	--------------	--

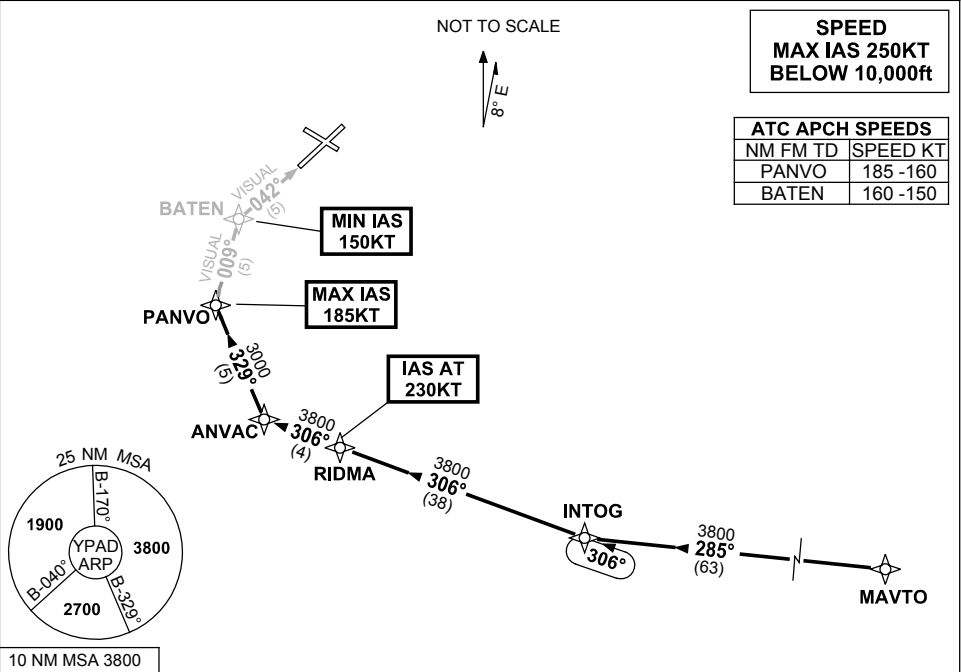

TRANSITION:

MAVTO: From MAVTO track 285° to INTOG
Then follow ARRIVAL instructions

ARRIVAL: INTOG ONE

RWY 05 VICTOR:

- From INTOG turn RIGHT, track 306° to RIDMA
IAS AT 230KT from RIDMA
- Track 306° to ANVAC
- Turn RIGHT, track 329° to PANVO
MAX IAS 185KT from PANVO
- Turn RIGHT, track 009° VISUAL to BATEN
MIN IAS 150KT from BATEN
- Turn RIGHT, Intercept VISUAL final RWY 05

**COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CTC AD APP 03-9235-2012**

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERS A EMERG Section 1.5.

Changes: WAYPOINT NAMES, PROC IDENT.

PADSR26-181