
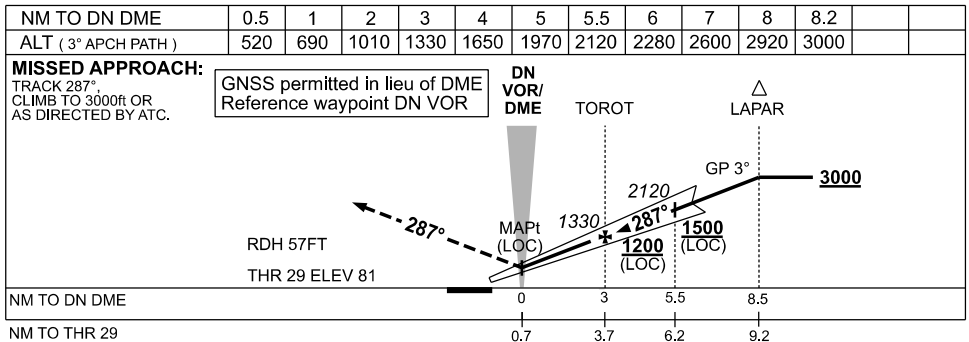


USE QNH

ILS-X or LOC-X RWY 29

DARWIN, NT (YPDN)

19 MAR 2026

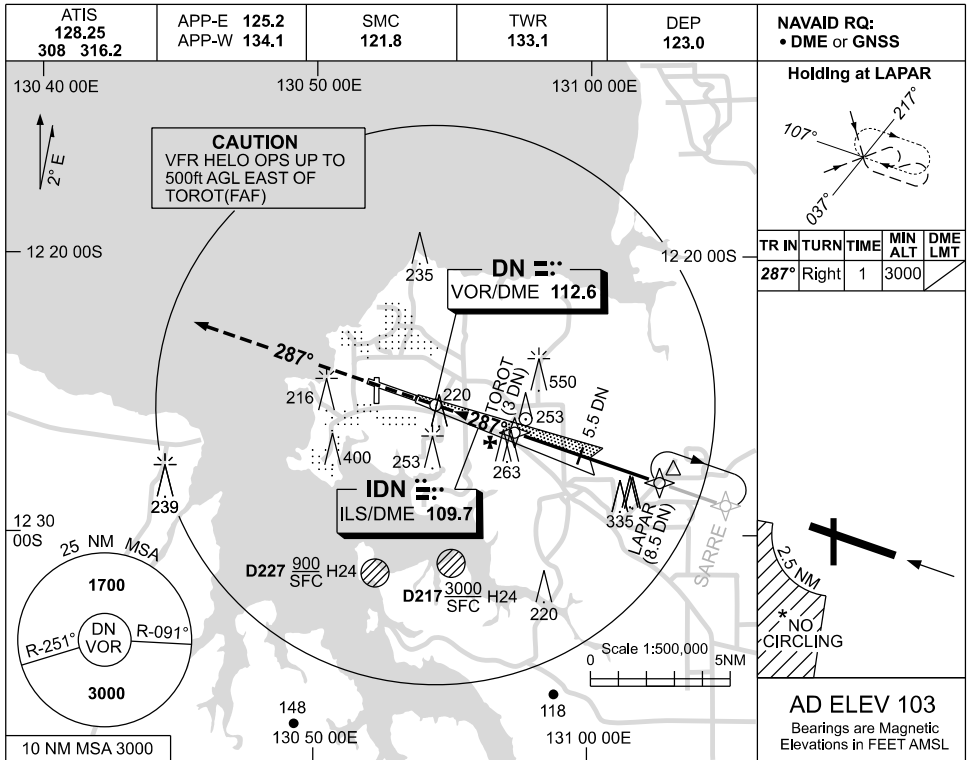

NOTES

1. ACFT MAY BE RADAR VECTORED TO FNA.
- * 2. SPECIAL ALTN MNM 800/4 KM.
3. DME 71X(112.4) NOT TO BE USED WITH THIS PROCEDURE.
- * 4. NO CIRCLING IN SECTOR SW OF RWY 11/29 AND RWY 18/36 BEYOND 2.5NM.

CATEGORY	A	B	C	D/D _L
S-I ILS		290 (209) 0.8		
S-I LOC		520 (439-1.6)		
CIRCLING *	700 (597-2.4)		800 (697-4.0)	1000 (897-5.0)
ALTERNATE *	(1097-4.4)		(1197-6.0)	(1397-7.0)

Changes: MAG VAR, Editorial.

PDNII02-186