


**STANDARD INSTRUMENT ARRIVAL (STAR)
JANDAKOT THREE GOLF ARRIVAL (RNAV)
PERTH/JANDAKOT, WA (YPJT)**

13 JUN 2024

ATIS (AWIS AH) 128.65 281	SMC 124.3	TWR (CTAF+AFRU AH) 118.1	FIA PH CEN 135.25	APP (PH) 123.6 132.95	DEP (PH) 118.7	PAL+AA (AH) 123.9	Bearings are Magnetic Elevations in FEET AMSL
------------------------------	--------------	--------------------------------	----------------------	--------------------------	-------------------	----------------------	--

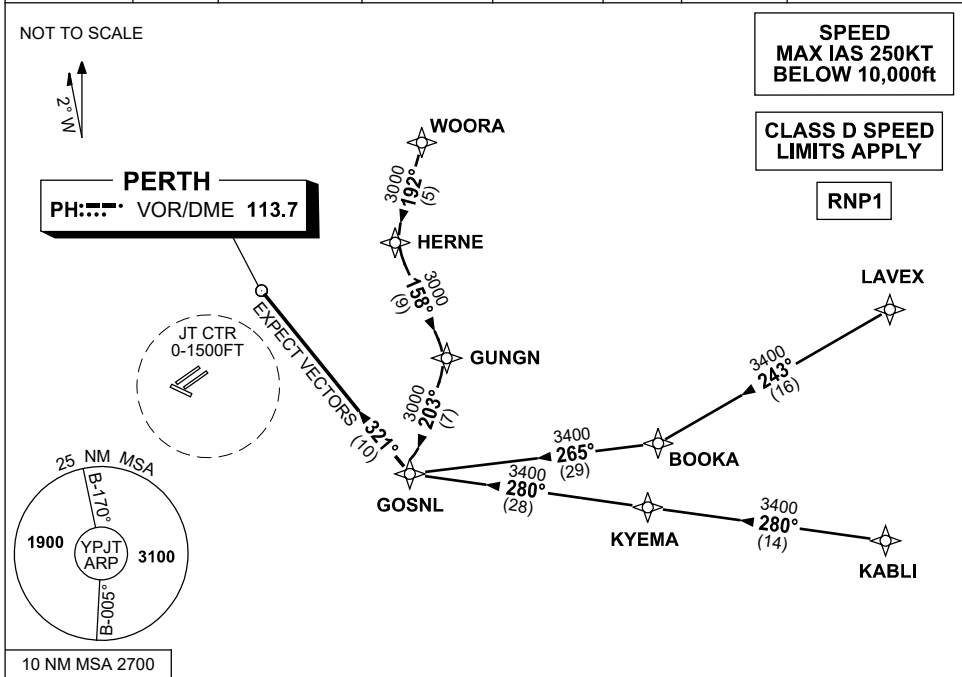

TRANSITIONS:

WOORA: From WOORA to GOSNL

- Track 192° to HERNE,
- Turn LEFT, track 158° to GUNGN,
- Turn RIGHT, track 203° to GOSNL,
- Then follow ARRIVAL instructions

LAVEX: From LAVEX to GOSNL
(NON-JET)

- Track 243° to BOOKA,
- Turn RIGHT, track 265° to GOSNL,
- Then follow ARRIVAL instructions

KABL I: From KABL I to GOSNL
(JET)

- Track 280° to KYEMA,
- Track 280° to GOSNL,
- Then follow ARRIVAL instructions

ARRIVAL: **JANDAKOT THREE GOLF**

From GOSNL, turn RIGHT, track 321° to PH VOR

- Expect radar vectors to YPJT

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600
- Comply with vertical navigation requirements and maintain minimum safe altitude.
- IF UNDER PILOT NAVIGATION track via the STAR clearance to Jandakot NDB, then in accordance with ERS A, EMERG.
- IF UNDER RADAR VECTOR, maintain vector for 2 minutes, then track to the Jandakot NDB, then in accordance with ERS A, EMERG.

Changes: LAVEX REPLACES GRENE, KABL I REPLACES BEVLY, VALIDITY INDICATOR, Editorial.

PJTSR02-179