


STANDARD INSTRUMENT ARRIVAL (STAR) JANDAKOT THREE ROMEO ARRIVAL (RNAV) PERTH/JANDAKOT, WA (YPJT)

13 JUN 2024

ATIS (AWIS AH) 128.65 281	SMC 124.3	TWR (CTAF+AFRU AH) 118.1	FIA PH CEN 135.25	APP (PH) 123.6 132.95	DEP (PH) 118.7	PAL+AA (AH) 123.9	Bearings are Magnetic Elevations in FEET AMSL
------------------------------	--------------	--------------------------------	----------------------	--------------------------	-------------------	----------------------	--

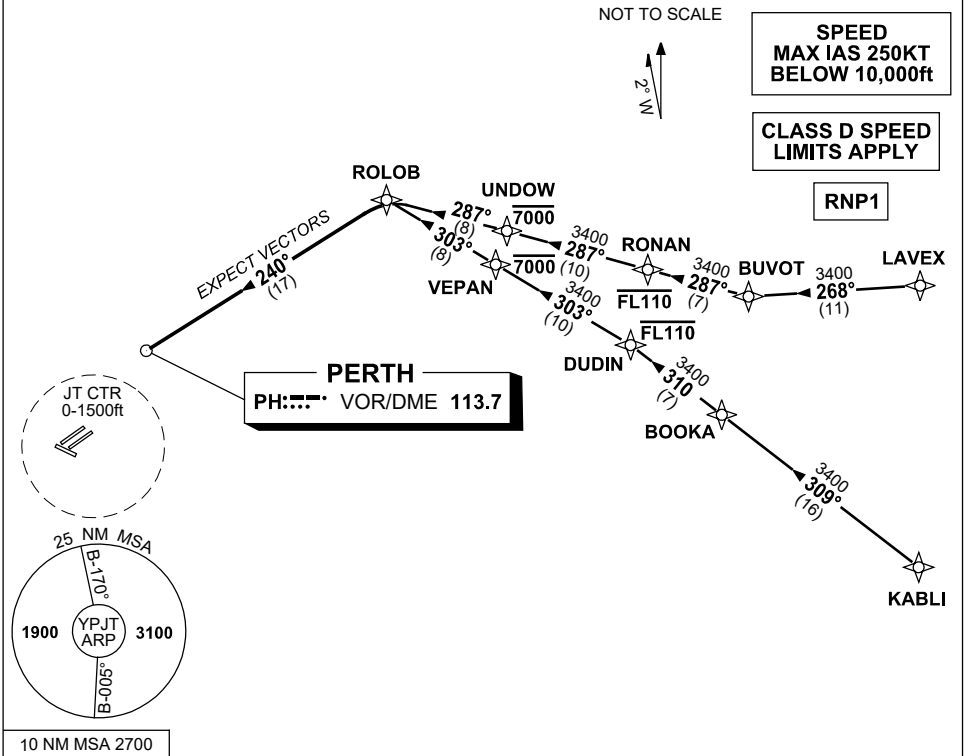

TRANSITIONS:

LAVEX: From LAVEX, track 268° to BUVOT,
(NON-JET) • Turn RIGHT, track 287° to RONAN,
Cross RONAN AT or BLW FL110,
• Track 287° to UNDOU,
Cross UNDOU AT or BLW 7000ft,
• Track 287° to ROLOB,
Then follow ARRIVAL instructions

KABLI: From KABLI, track 309° to BOOKA,
(JET) • Track 310° to DUDIN,
Cross DUDIN AT or BLW FL110,
• Turn LEFT, track 303° to VEPAN,
Cross VEPAN AT or BLW 7000ft,
• Track 303° to ROLOB,
Then follow ARRIVAL instructions

ARRIVAL: JANDAKOT THREE ROMEO

- From ROLOB turn LEFT
- Track 240° to PH VOR
 - Expect radar vectors to YPJT

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600
- Comply with vertical navigation requirements and maintain minimum safe altitude.
- IF UNDER PILOT NAVIGATION track via the STAR clearance to Jandakot NDB, then in accordance with ERSA, EMERG.
- IF UNDER RADAR VECTOR, maintain vector for 2 minutes, then track to the Jandakot NDB, then in accordance with ERSA, EMERG.

Changes: WAYPOINT NAMES, VALIDITY INDICATOR, Editorial.

PJTSR03-179