

**AIP SUPPLEMENT
(SUP)****AIRAC****H186/25****Effective: 202511261600 UTC**

AERONAUTICAL INFORMATION SERVICE,
AIRSERVICES AUSTRALIA, GPO BOX 367,
CANBERRA ACT 2601

For **DISTRIBUTION** queries, contact:
Email: aim_editorial@airservicesaustralia.com

For **CONTENT** queries regarding this SUP, contact:
Email: ifp@airservicesaustralia.com

WILKINS RUNWAY (YWKS) REVISED PROCEDURES

1. INTRODUCTION

- 1.1 This AIP SUP replaces SUP H173/25 with changes to the PAPI eye height published in Appendix 1.
- 1.2 This AIP SUP amends the RNP RWY 09T Instrument Approach Procedure and aerodrome chart at Wilkins Runway due to apron and runway data changes.
- 1.3 New RNP APCH waypoints have been designed, to ensure continued alignment with the new RWY position.

2. WAYPOINTS

- 2.1 New waypoints for the amended RNP RWY 09T:

Name	LAT	LONG
WR4WA	664517.23S	1105901.92E
WR4WB	664022.50S	1105138.97E
WR4WC	663559.92S	1110045.43E
WR4WI	664044.48S	1110411.14E
WR4WF	664105.47S	1111643.67E

- 2.2 The following waypoints are no longer in use from the effective date of this SUP: WR3WA, WR3WB, WR3WC, WR3WI, WR3WF.
- 2.3 Recommended coding is available on request.

3. AERODROME DATA

3.1 Amended aerodrome data:

ARP/Threshold	Latitude	Longitude	Elevation
ARP/AD ELEV	664129.02S	1113134.86E	2522 FT
RWY 09T	664125.46S	1112916.55E	2360 FT
RWY 27T	664131.72S	1113320.64E	2514 FT

4. IMPLEMENTATION

4.1 The procedures in the appendices become effective 202511261600 UTC.

5. CANCELLATION

5.1 This SUP will be cancelled when it is incorporated into AIP DAP, expected to be in DAP Amendment 186, effective 19 March 2026.

6. DISTRIBUTION

6.1 Airservices Australia website only.


Appendices

- 1. AERODROME CHART
- 2. RNP RWY 09T

APPENDIX 1
TO SUP H186/25

AD ELEV 2522
66 41 29S 111 31 35E


AERODROME CHART
WILKINS RUNWAY, ANTARCTICA (YWKS)

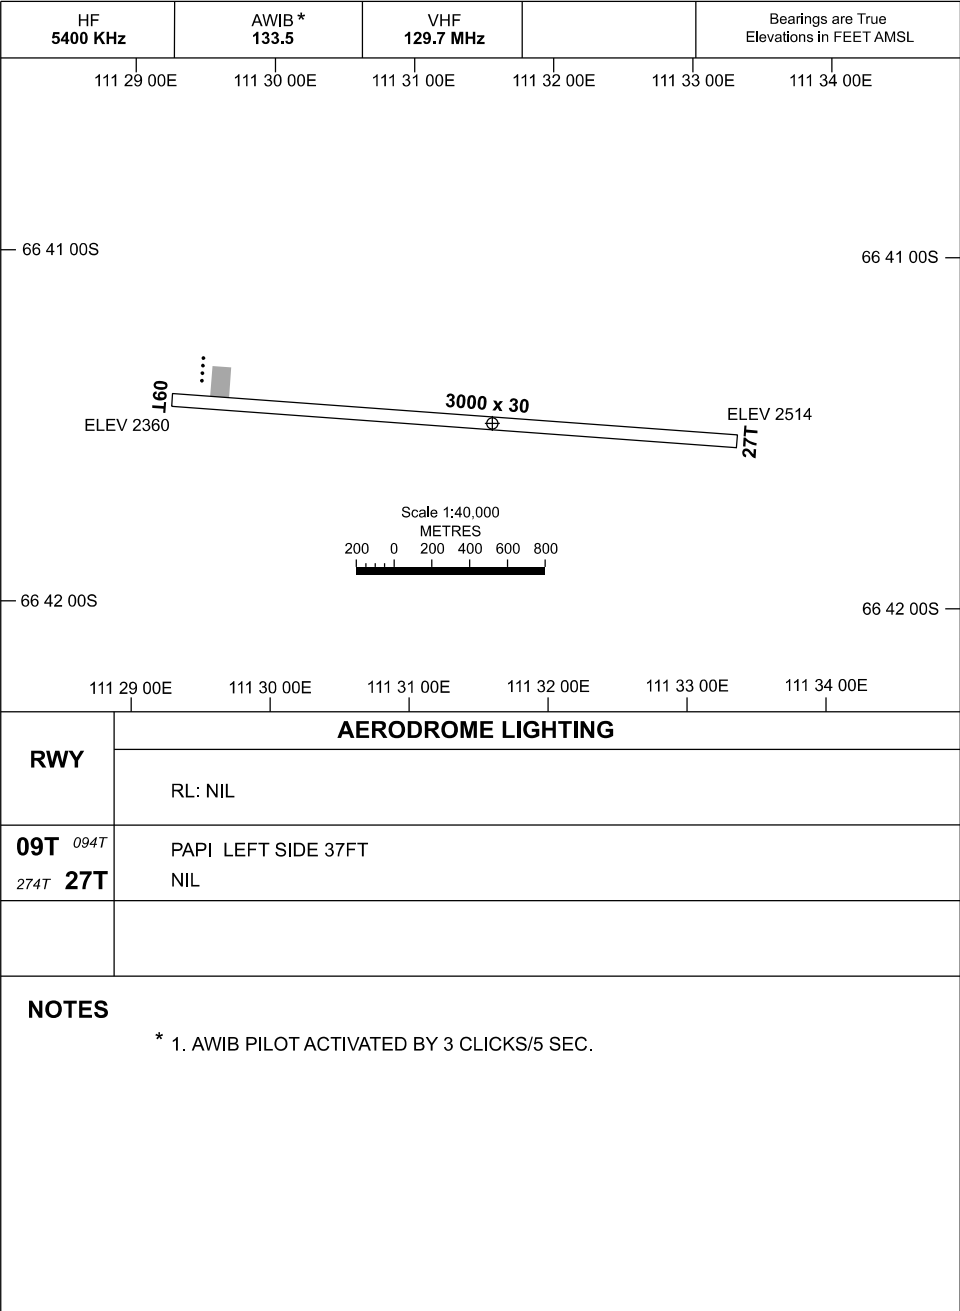


APPENDIX 2
TO SUP H186/25

USE QNH
WILKINS RUNWAY, ANTARCTICA (YWKS)

RNP RWY 09T

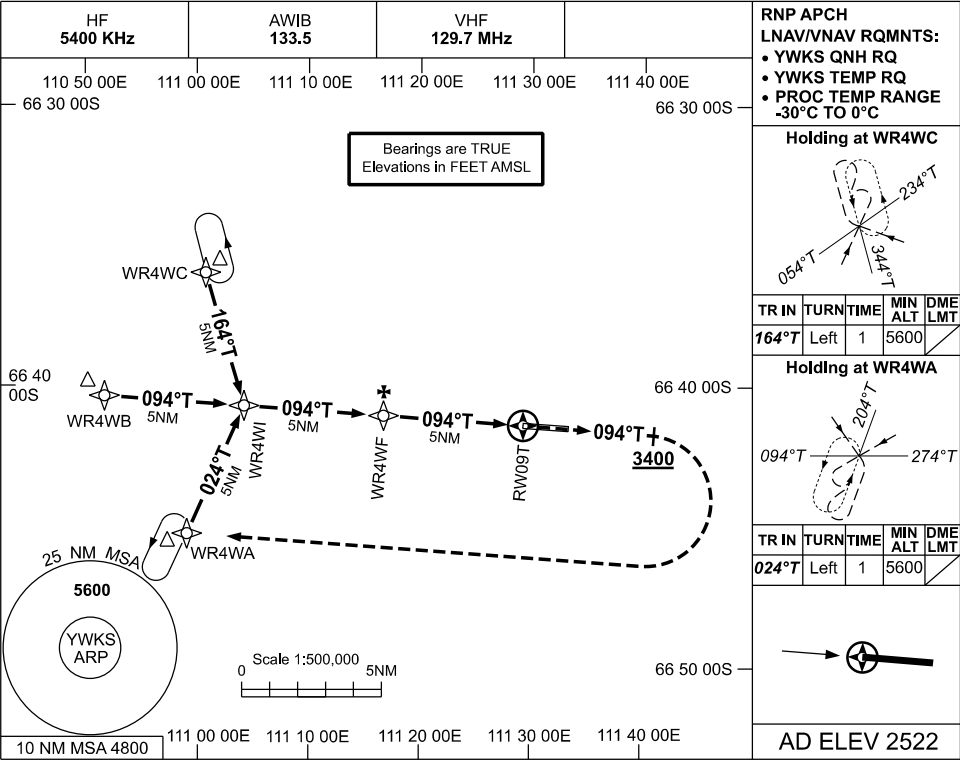

NM TO NEXT WPT	WR4WI	4	3	2	1	WR4WF	4	3	2	1.3	0.7	RW09T
ALT (3° APCH PATH)	5600	5280	4960	4640	4320	4000	3680	3370	3050	2810	2630	

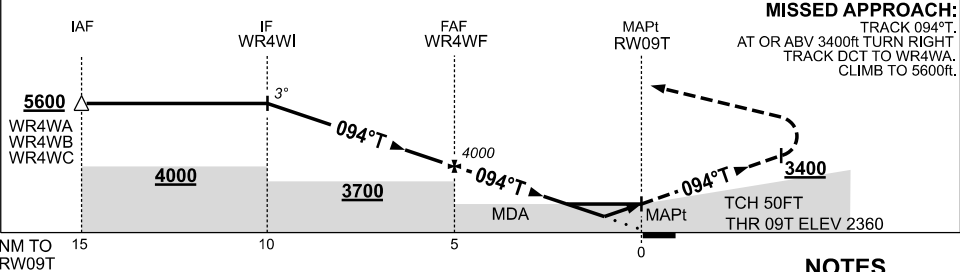

NOTES

1. MAX IAS:
INITIAL : 210KT.
2. READINGS FROM RADIO
& RADAR ALTIMETERS
MAY BE ERRATIC OVER
ICE & SNOW SURFACES.
3. NO TEMPERATURE
CORRECTION RQ FOR
INITIAL & INTERMEDIATE
MNM SEGMENT ALT AT
-30°C AND ABOVE

CATEGORY	A	B	C	D
LNAV/VNAV		2630 (270-1.5)		
LNAV		2810 (450-2.5)		
CIRCLING	3290 (768-2.4)		3550 (1028-4.0)	3650 (1128-5.0)
ALTERNATE	(1268-4.4)		(1528-6.0)	(1628-7.0)

Changes: REVISED PROC, AD ELEV, THR ELEV.

WKSGN01-SUP