


03 SEP 2026

ATIS 113.2	125.5	NORTH 124.7	APP 125.6	SOUTH 119.25	FINALS	TWR 011L/19R 01R/19L	118.0 120.5	NORTH 124.05	SMC DOM 121.7	SOUTH 122.25	Bearings are Magnetic Elevations in FEET AMSL
---------------	-------	----------------	--------------	-----------------	--------	----------------------------	----------------	-----------------	---------------------	-----------------	--

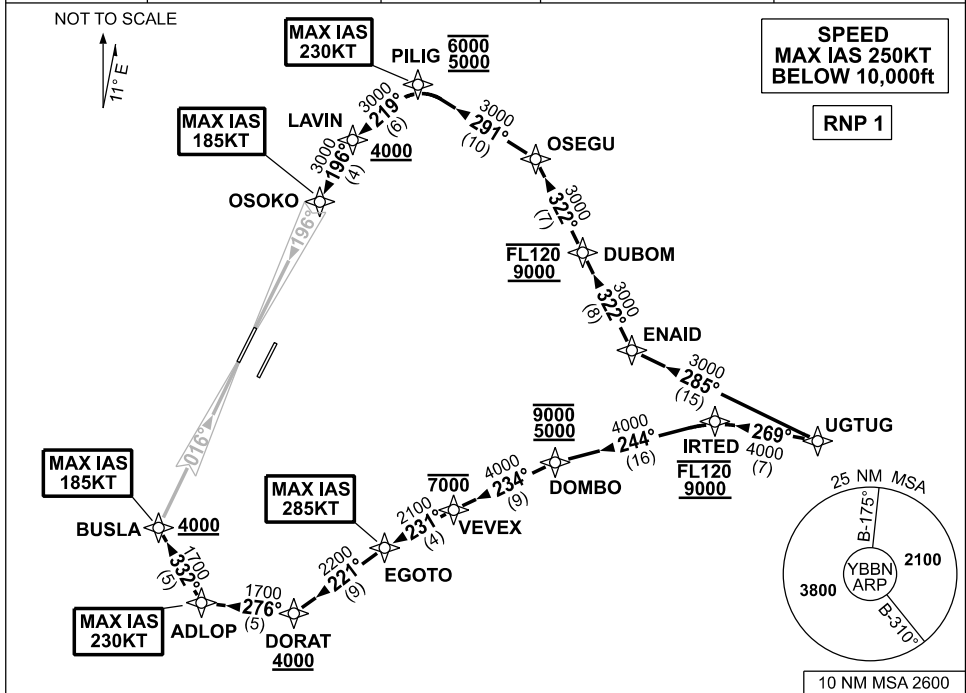

RWY 01L:

- RWY 19R:**

- From UGTUG track 285° to ENAID
- Turn RIGHT track 322° to DUBOM
Cross DUBOM BTN 9000ft and FL120
- Track 322° to OSEGU
- Turn LEFT track 291° to PILIG
Cross PILIG BTN 5000ft and 6000ft
MAX IAS 230KT AT PILIG
- Turn LEFT track 219° to LAVIN
Cross LAVIN AT or ABV 4000ft
- Turn LEFT track 196° to OSOKO
for ILS, RNP Z or LOC RWY 19R approach
MAX IAS 185KT AT OSOKO

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

BBNSR44-188