


26 NOV 2026

ATIS 113.0 131.1	APP 118.4 126.1	TWR 124.9	SMC 121.7	Bearings are Magnetic Elevations in FEET AMSL
---------------------	--------------------	--------------	--------------	--

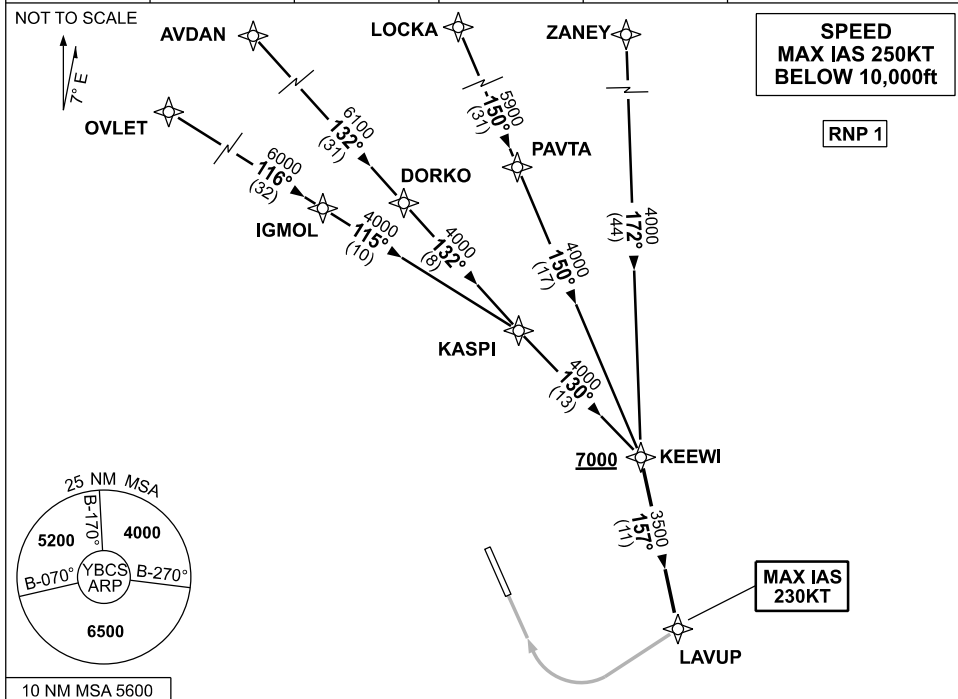

<u>ZANEY:</u> • From ZANEY track 172° to KEEWI <u>LOCKA:</u> • From LOCKA track 150° to PAVTA • Track 150° to KEEWI	<u>AVDAN:</u> • From AVDAN track 132° to DORKO • Track 132° to KASPI • Track 130° to KEEWI <u>OVLET:</u> • From OVLET track 116° to IGMOL • Track 115° to KASPI • Track 130° to KEEWI
---	---

ARRIVAL: **KEEWI FIVE**
 Cross KEEWI AT or ABV 7000ft

RWY 33 SIERRA: • From KEEWI track 157° to LAVUP, then via RNP S RWY 33 (AR)
 MAX IAS 230KT from LAVUP

RWY 33 X-RAY: • From KEEWI track 157° to LAVUP, then via RNP X RWY 33 (AR)
 MAX IAS 230KT from LAVUP

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

BCSSR12-189