BALLINA/BYRON GATEWAY, NSW (YBNA)

ATIS	AWIS	APP/DEP	TWR	FIA (AH)	CTAF+AFRU (AH)	PAL+AA	Bearings are Magnetic Elevations in FEET AMSL
128.65	134.8	118.35	124.2	BN CEN 120.3	124.2	121.3	

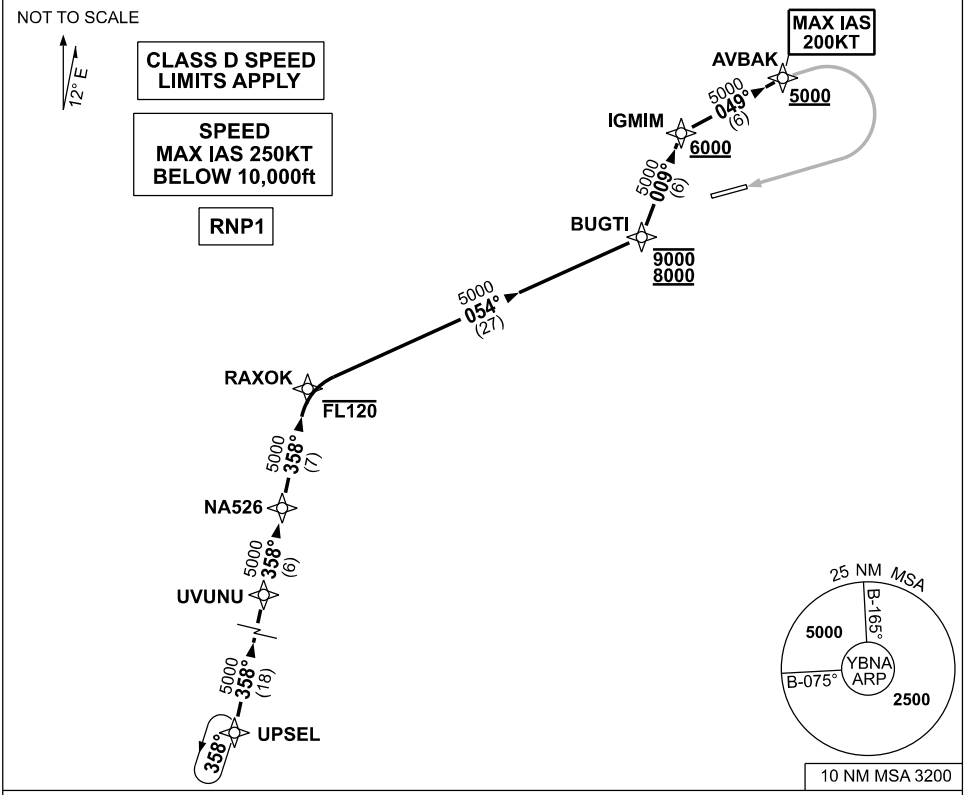

UPSEL ONE YANKEE ARRIVAL

RWY 24:

- From UPSEL, track 358° to UVUNU
- Track 358° to NA526
- Track 358° to RAXOK
  Cross RAXOK AT or BLW FL120
- Turn RIGHT track 054° to BUGTI
  Cross BUGTI BTN 8000ft and 9000ft
- Turn LEFT track 009° to IGMIM
  Cross IGMIM AT or ABV 6000ft
- Turn RIGHT track 049° to AVBAK
  Cross AVBAK AT or ABV 5000ft
  MAX IAS 200KT at AVBAK
- Track via RNP Y RWY 24 (AR)

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: NEW PROCEDURE, FREQ.

© Airservices Australia