

RNP Z RWY 28
BROOME/INTL, WA (YBRM)

Communication Frequencies:

ATIS 128.2	AWIS (AH) 126.55	TWR (CTAF+AFRU AH) 126.0	SMC (TWR HR) 121.7	FIA (AH) BN CEN 123.95	AFRU+PAL 126.0
---------------	---------------------	-----------------------------	-----------------------	---------------------------	-------------------

RNP APCH
LNAV/VNAV RQMNTS:
 • YBRM QNH RQ
 • YBRM TEMP RQ
 • PROC TEMP RANGE
 +5°C TO +61°C

Holding at BRMEB

TR IN	TURN	TIME	MIN ALT	DME LMT
284°	Right	1	3000	


AD ELEV 57
 Bearings are Magnetic
 Elevations in FEET AMSL

Chart Details:

- Scale:** 1:500,000
- Distances:** 0 to 5 NM
- Navigation Aids:** YBRM ARP (2100), BRMEB, BRMEC, BRMEF, BRMEI, BRMEA, BRMEH, BRMEM.
- Flight Paths:** 284° (Right turn, 1 minute, 3000 feet), 214° (5 NM), 284° (5 NM), 354° (5 NM).
- Obstacles:** 213, 344, 295, 390, 128, 223.
- MSA:** 25 NM MSA 2100, 10 NM MSA 1500.

NM TO NEXT WPT	BRMEM	0.8	1.4	2	3	4	BRMEF	1	2	3	4		
ALT (3° APCH PATH)		410	600	780	1100	1420	1740	2060	2370	2690	3000		

TRACK DCT TO BRMEH,
THEN TRACK 284°.
CLIMB TO 2100FT. F

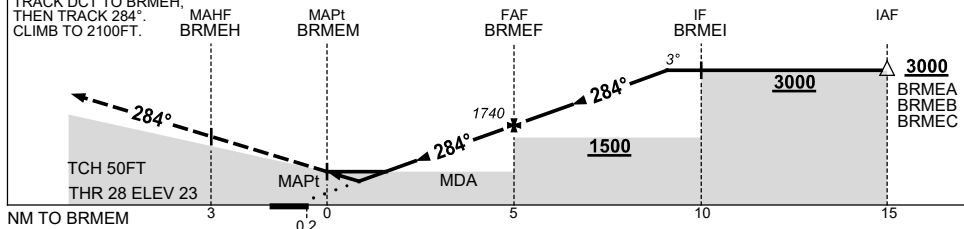

CATEGORY	A	B	C	D
LNAV/VNAV	410 (387-2.2)			
LNAV	600 (577-3.3)			
CIRCLING	650 (593-2.4)	840 (783-4.0)		
ALTERNATE	(1093-4.4)	(1283-6.0)		(1293-7.0)

1. MAX IAS:
INITIAL : 210KT.
2. HOLDING NOT
CONTAINED IN
CTA

BRMGN02-172