ATIS	ACD	SMC	TWR	FIA (AH)	CTAF+AFRU (AH)	AWIS (AH)	Bearings are Magnetic
114.1 133.5 276	128.1	121.8 264.6	118.3	BN CEN 120.55	AFRU+PAL (AH) 118.3	133.5	Elevations in FEET AMSL



10 NM MSA 3600

DME USING TL DME
REFERENCE WAYPOINT TL VOR

SPEED
MAX IAS 250KT
BELOW 10,000FT



* NO CIRCLING IN SECTOR EAST OF RWY 01 & RWY 19.

AD ELEV 18

SECTOR D

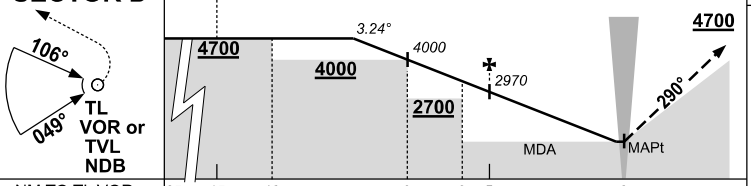

MISSED APPROACH:
TURN LEFT,
TRACK 290°.
CLIMB TO 4700ft OR
AS DIRECTED BY ATC.

NM TO TL VOR	25	15	13	8	6	5	0

CIRCLING MINIMA	A,B: 1350-2.4	C: 1350-4.0	D: 1380-5.0

NM TO TL VOR	10	9	8	7	6	5	4	3	2	1	0.3				
ALT(3.24° APCH PATH)	4700	4350	4000	3660	3310	2970	2620	2280	1940	1590	1350				

LINSU TO TL

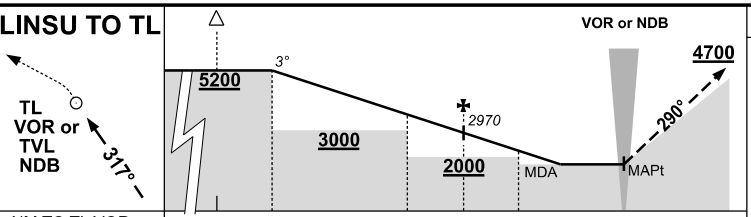

MISSED APPROACH:
TURN LEFT,
TRACK 290°.
CLIMB TO 4700ft OR
AS DIRECTED BY ATC.

NM TO TL VOR	25	15	13	8	6	4	0

CIRCLING MINIMA	A,B: 1800-2.4	C: 1800-4.0	D: 1800-5.0

NM TO TL VOR	13	12	11	10	9	8	7	6	5	4	3	2.3			
ALT (3° APCH PATH)	5200	4880	4560	4240	3930	3610	3290	2970	2650	2340	2020	1800			

© Airservices Australia