

STANDARD INSTRUMENT ARRIVAL (STAR)
POROB TWO PAPA ARRIVAL (RNAV)

TOWNSVILLE/TOWNSVILLE INTL, QLD (YBTL)


21 MAR 2024

ATIS	ACD	SMC	TWR	APP/DEP	FIA (AH)	CTAF+AFRU (AH)	AWIS (AH)	Bearings are Magnetic Elevations in FEET AMSL
114.1 133.5 276	128.1	121.8 264.6	118.3	126.8	BN CEN 120.55	AFRU+PAL (AH) 118.3	133.5	

NOT TO SCALE

SPEED
MAX IAS 250KT
BELOW 10,000ft

RNP 1

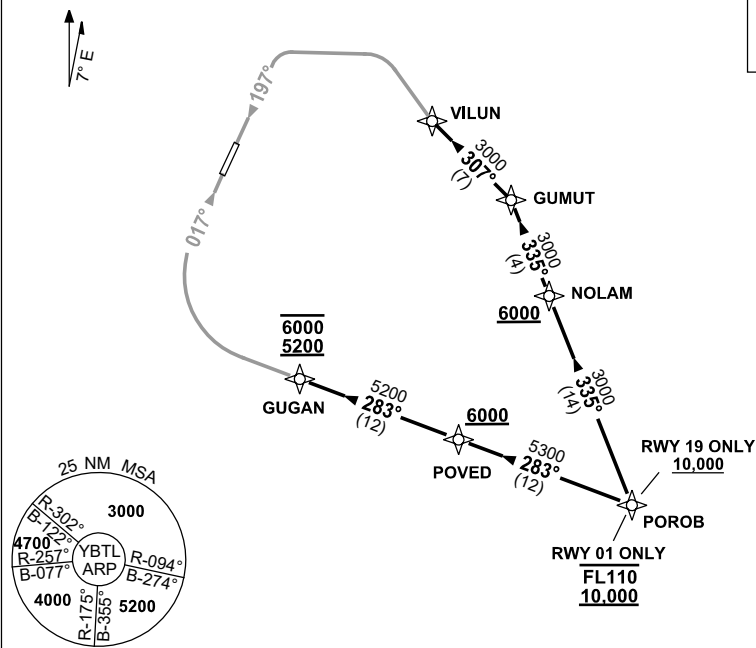

POROB TWO ARRIVAL

RWY 01 PAPA:

- Cross** POROB BETWEEN 10,000ft-FL110
- From POROB track 283° to POVED
- Cross** POVED AT or ABV 6000ft
- Track 283° to GUGAN
- Cross** GUGAN BETWEEN 5200-6000ft
- From GUGAN track via RNP P RWY 01 (AR)

RWY 19 PAPA:

- Cross** POROB AT or ABV 10,000ft
- From POROB track 335° to NOLAM
- Cross** NOLAM AT or ABV 6000ft
- Track 335° to GUMUT
- Turn LEFT track 307° to VILUN
- From VILUN track via RNP P RWY 19 (AR)

COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CTC TL APP 07-4752-1207

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSB EMERG Section 1.5.

Changes: STAR VALIDITY INDICATOR, Editorial.

BTLSR04-178