

STANDARD INSTRUMENT ARRIVAL (STAR)
VOMPA TWO PAPA ARRIVAL (RNAV)

TOWNSVILLE/TOWNSVILLE INTL, QLD (YBTL)

21 MAR 2024



ATIS	ACD	SMC	TWR	APP/DEP	FIA (AH)	CTAF+AFRU (AH)	AWIS (AH)	Bearings are Magnetic Elevations in FEET AMSL
114.1 133.5 276	128.1	121.8 264.6	118.3	126.8	BN CEN 120.55	AFRU+PAL (AH) 118.3	133.5	

NOT TO SCALE



SPEED
MAX IAS 250KT
BELOW 10,000ft

RNP 1

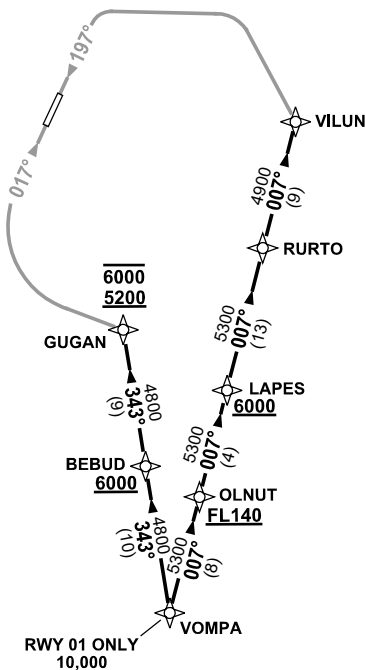

10 NM MSA 3600

VOMPA TWO ARRIVAL

RWY 01 PAPA:

- Cross** VOMPA AT or ABV 10,000ft
- From VOMPA track 343° to BEBUD
- Cross** BEBUD AT or ABV 6000ft
- Track 343° to GUGAN
- Cross** GUGAN BETWEEN 5200-6000ft
- From GUGAN track via RNP P RWY 01 (AR)

RWY 19 PAPA:

- From VOMPA track 007° to OLNUT
- Cross** OLNUT AT or ABV FL140
- Track 007° to LAPES
- Cross** LAPES AT or ABV 6000ft
- Track 007° to RURTO
- Track 007° to VILUN
- From VILUN track via RNP P RWY19 (AR)

**COMMUNICATIONS FAILURE: PROCEDURE IN IMC
IF ABLE CTC TL APP 07-4752-1207**

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: STAR VALIDITY INDICATOR.

BTLSR08-178