FIA	CTAF+AFRU	AFRU+PAL			Bearings are Magnetic Elevations in FEET AMSL
ML CEN 120.75	118.1	118.1			



10 NM MSA 5700

DME USING COM DME
REFERENCE WAYPOINT COM NDB

AWIS (PHONE) 02 9353 6414





* NO CIRCLING WEST OF RWY 18/36.

AD ELEV 3106

CB TO COM

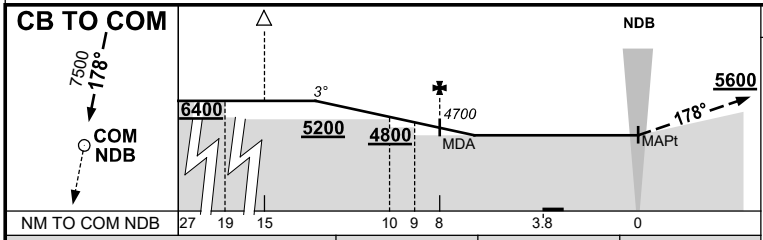

MISSED APPROACH:
TRACK 178°, CLIMB TO 5600FT.

CIRCLING MINIMA	A,B: 4330-5.0	C: 4330-5.0	D: 4330-5.0

NM TO COM NDB	13.3	13	12	11	10	9	8	7	6.8
ALT (3° APCH PATH)	6400	6290	5970	5660	5340	5020	4700	4380	4330

SECTOR A

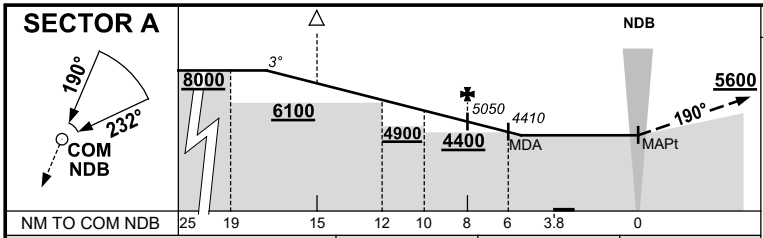

MISSED APPROACH:
TRACK 190°, CLIMB TO 5600FT.

CIRCLING MINIMA	A,B: 4250-5.0	C: 4250-5.0	D: 4250-5.0

NM TO COM NDB	17.3	17	16	15	14	13	12	11	10	9	8	7	6	5.5
ALT (3° APCH PATH)	8000	7920	7600	7280	6960	6640	6320	6010	5690	5370	5050	4730	4410	4250

SECTOR B

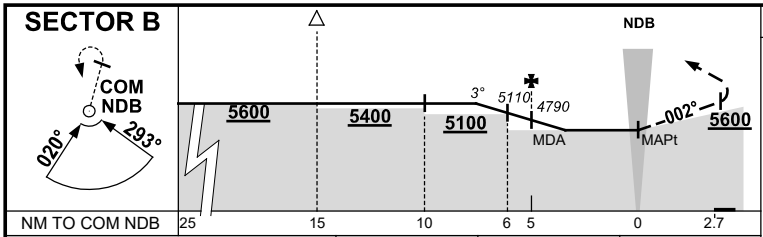

MISSED APPROACH:
TRACK 002°, CLIMB TO 5600FT, THEN TURN LEFT TO NDB.

CIRCLING MINIMA	A,B: 4250-5.0	C: 4250-5.0	D: 4250-5.0

NM TO COM NDB	7.5	7	6	5	4	3.3
ALT (3° APCH PATH)	5600	5430	5110	4790	4470	4250

Changes: FIA

COMDG01-174

© Airservices Australia

airservices