

NDB RWY 24
EMERALD, QLD (YEML)

AWIS 132.95	FIA BN CEN 122.3	CTAF+AFR 126.7	PAL+AA 120.6
------------------------------	-----------------------------------	---------------------------------	-------------------------------

Bearings are Magnetic
Elevations in FEET AMSL

148 00 00E
148 10 00E
148 20 00E

23 30 00S
23 30 00S
23 40 00S

The map shows a central area with several navigation aids and bearings. A large circle represents the 25 NM MSA. A smaller circle represents the 10 NM MSA. A dashed line indicates a bearing of 251° from the EML NDB. Other bearings shown are 910, 748, 790, 764, 697, 1017, 251°, 083°, and 095°. A scale bar indicates 1:500,000. A compass rose shows magnetic bearings of 165°, 275°, and 345°.

TR IN	TURN	TIME	MIN ALT	DME LMT
095°	Left	1	3300	


148 10 00E
148 20 00E

23 40 00S
23 40 00S

10 NM MSA 2100
AD ELEV 622

[illegible]

TRACK 251°. CLIMB TO 3300FT.

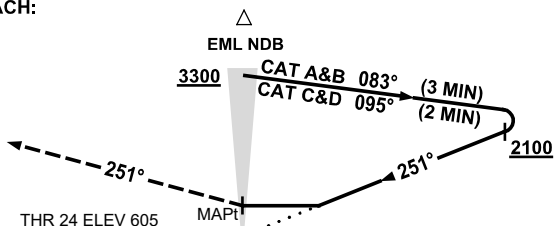

1. MAX IAS:
INITIAL :
CAT C&D 210KT.

CATEGORY	A	B	C	D
S-I NDB	1320 (715-4.1)			
CIRCLING	1420 (798-2.4)		1520 (898-4.0)	1520 (898-5.0)
ALTERNATE	(1298-4.4)		(1398-6.0)	(1398-7.0)

EMLNB01-171