FIA	CTAF	PAL+AA			Bearings are Magnetic Elevations in FEET AMSL
ML CEN 121.2	126.7	120.6			



10 NM MSA 3500

REFERENCE WAYPOINT LEC NDB
AWIS (PHONE) 08 8150 3807



* NO CIRCLING IN SECTOR SW OF RWYS 02/20 AND 11/29.

AD ELEV 856

SECTOR A



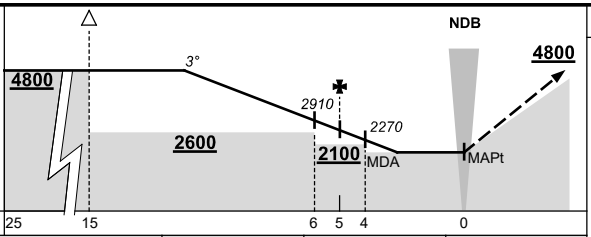

MISSED APPROACH:
CLIMB ON TRACK TO 4800FT.

CIRCLING MINIMA	A,B: 1770-2.4	C: 1930-4.0	D: N/A

NM TO LEC NDB	12	11	10	9	8	7	6	5	4	3	2.4
ALT (3° APCH PATH)	4800	4500	4180	3860	3540	3220	2910	2590	2270	1950	1770

SECTOR B



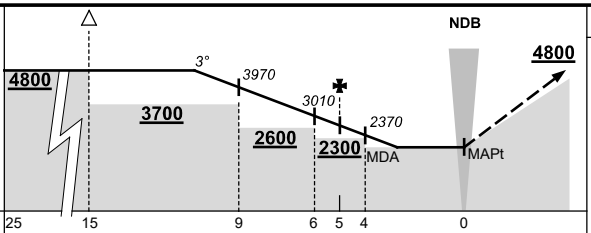

MISSED APPROACH:
CLIMB ON TRACK TO 4800FT.

CIRCLING MINIMA	A,B: 1830-2.4	C: 1930-4.0	D: N/A

NM TO LEC NDB	11.6	11	10	9	8	7	6	5	4	3	2.3
ALT (3° APCH PATH)	4800	4600	4280	3970	3650	3330	3010	2690	2370	2050	1830

SECTOR C



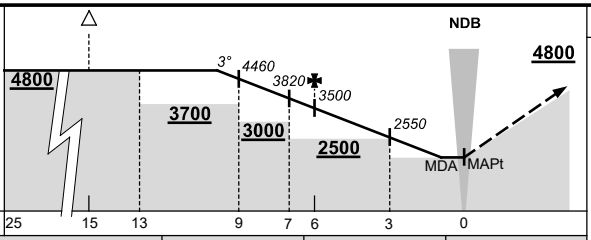

MISSED APPROACH:
CLIMB ON TRACK TO 4800FT.

CIRCLING MINIMA	A,B: 1960-2.4	C: 1960-4.0	D: N/A

NM TO LEC NDB	10.1	10	9	8	7	6	5	4	3	1.2
ALT (3° APCH PATH)	4800	4780	4460	4140	3820	3500	3190	2870	2550	1960

Changes: PAL+AA

© Airservices Australia

airservices