

ILS-Z or LOC-Z RWY 18
AVALON, VIC (YMAV)

NAVAID REQ:

- DME or GNSS (ILS)
- DME (LOC ONLY)

Holding at MAKAT

TR IN TURN	TIME	MIN ALT	DME LMT
176° Left	1	3000	15

* NO CIRCLING *


AD ELEV 35

Bearings are Magnetic
Elevations in FEET AMSL

NM TO IAV DME	1.9	3	4.1	5	6	7	8	9	9.3				
ALT (3° APCH PATH)	620	980	1340	1620	1940	2250	2570	2890	3000				

MISSED APPROACH:

TRACK 176°.
CLIMB TO 3000ft.

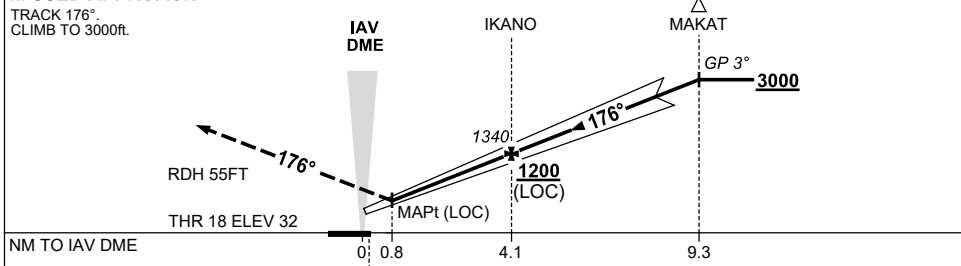

NM TO THR 18

CATEGORY	A	B	C	D/D _L
S-I ILS		390 (358)	2.0 (VIS 1.5 WITH ACTUAL QNH)	
S-I LOC		620 (585-3.3)		
CIRCLING *	660 (625-2.4)		760 (725-4.0)	830 (795-5.0)
ALTERNATE	(1125-4.4)		(1225-6.0)	(1295-7.0)

* 1. NO CIRCLING WEST
OF RWY 18 / 36.

2. HLDG PATTERN
NOT CONTAINED
WITHIN CTA.

Changes: WPT NAME.

MAVII02-183