

ILS-Z or LOC-Z RWY 18
AVALON, VIC (YMAV)

ATIS 118.2 116.1 AWIS (AH) 116.1 AV APP 133.55 TWR 120.1 FIA (AH) ML CEN 135.7 CTAF+AFRU (AH) 120.1 AFRU+PAL (AH) 120.1

37 50 00S 144 20 00E 144 30 00E 144 40 00E

38 00 00S 38 10 00S

11°E

MAKAT (9.3 IAV)

1142

IKANO (4.1 IAV)

0.8 IAV

176°

176°

421

25 NM MSA

3700

2900

2500

AV VOR

10 NM MSA 2500

Scale 1:500,000

0 5NM

Holding at MAKAT

066°

246°

356°

TR IN	TURN	TIME	MIN ALT	DME LMT
176°	Left	1	3000	15

* NO CIRCLING *

AD ELEV 35


Bearings are Magnetic

Elevations in FEET AMSL

NM TO IAV DME	1.9	3	4.1	5	6	7	8	9	9.3				
ALT (3° APCH PATH)	620	980	1340	1620	1940	2250	2570	2890	3000				

MISSED APPROACH:

TRACK 176°.
CLIMB TO 3000ft.

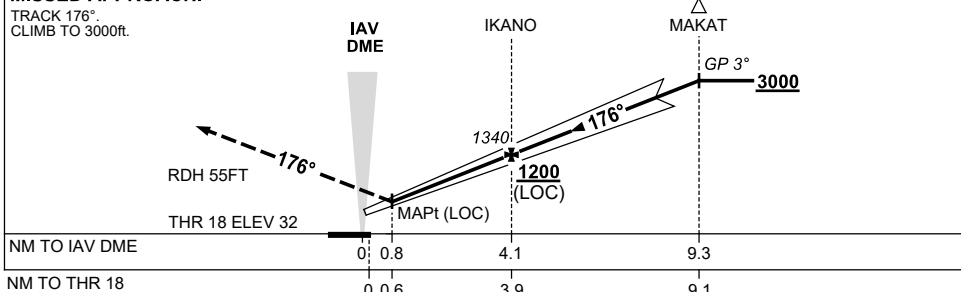

NOTES

CATEGORY	A	B	C	D/D _L
S-I ILS		390 (358)	2.0 (VIS 1.5 WITH ACTUAL QNH)	
S-I LOC		620 (585-3.3)		
CIRCLING *	660 (625-2.4)		760 (725-4.0)	830 (795-5.0)
ALTERNATE	(1125-4.4)		(1225-6.0)	(1295-7.0)

- * 1. NO CIRCLING WEST
OF RWY 18 / 36.
2. HLDG PATTERN
NOT CONTAINED
WITHIN CTA.

Changes: WPT NAME.

MAVII02-183