AWIS	ATIS	TWR	SMC	CTAF+AFRU (AH)	FIA (AH)	AFRU+PAL (AH)	Bearings are Magnetic Elevations in FEET AMSL
134.525	**115.6 133.85**	**123.25**	**121.8**	**123.25**	**ML CEN 125.2**	**123.25**	



10 NM MSA 4200

DME USING AY DME
REFERENCE WAYPOINT AY VOR

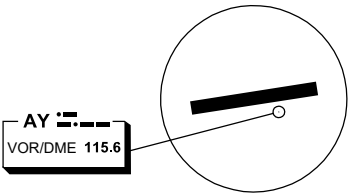

AD ELEV 539

SECTOR D



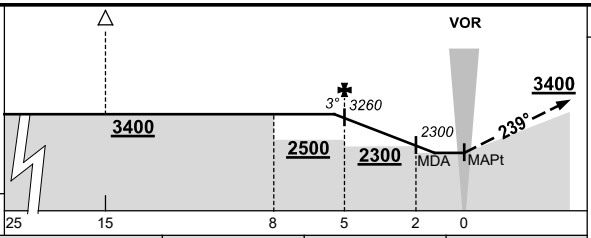

MISSED APPROACH:

TURN AS APPROPRIATE, TRACK 239°. CLIMB TO 3400FT.

NOTE: PROC NOT AVBL WHEN **R368** ACT UNLESS ADVISED BY ATC.

CIRCLING MINIMA	**A,B: 2130-2.4**	**C: 2220-4.0**	**D: 2270-5.0**

NM TO AY VOR/DME	5.5	5	4	3	2	1.9	1.7	1.5						
ALT (3° APCH PATH)	3400	3260	2940	2620	2300	2270	2220	2130						

Changes: SEC D CAT AB MINIMA, DIST-ALT TABLE, CIRCLING CAT C MINIMA, NEW LOGO.

MAYDG02-177

© Airservices Australia

airservices australia