FOR CASA APPROVED OPERATORS ONLY
RNP-AR APPROACH PROCEDURE

USE QNH

RNP W RWY 30 (AR)

12 JUN 2025

HOBART, TAS (YMHB)

ATIS	AWIS	SMC	TWR	HB APP/FIA (AH)	CTAF+AFRU (AH)	AFRU+PAL (AH)
112.7 128.45	122.375	121.7	118.1	ML CEN 125.55	118.1	118.1

RNP AR APCH
- RF RQ
- YMHB ACT QNH RQ
- YMHB ACT TEMP RQ
- PROC TEMP RANGE -5°C TO +49°C

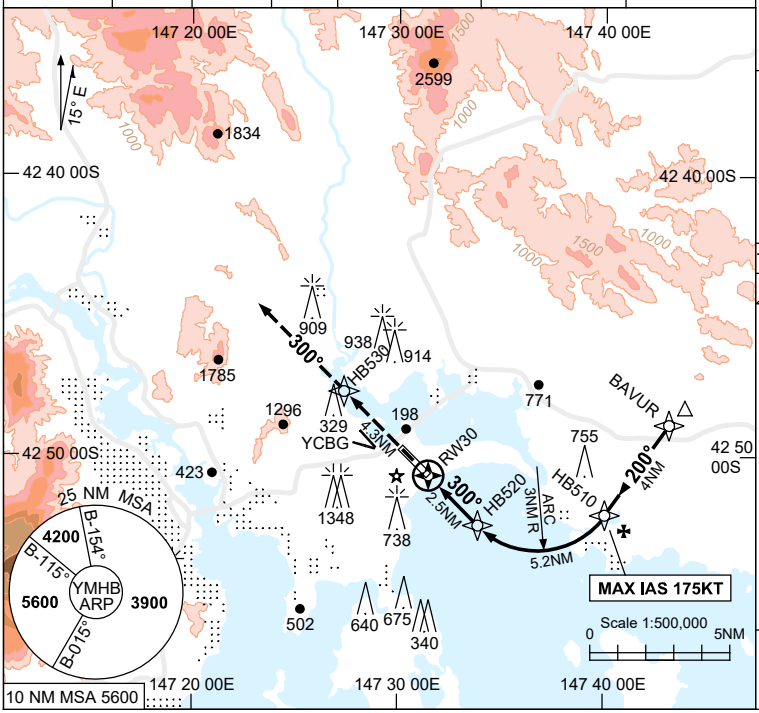

Holding as directed by ATC

TR IN	TURN	TIME	MIN ALT	DME LMT

AD ELEV 13

Bearings are Magnetic
Elevations in FEET AMSL

NM TO NEXT WPT	RW30	1	1.7	HB520	1	2	3	4	HB510				
ALT (3° APCH PATH)		370	600	860	1180	1500	1820	2130	2510				

MISSED APPROACH:
TRACK 300° TO HB530, THEN TRACK 300°. CLIMB TO 4200ft OR AS DIRECTED BY ATC.

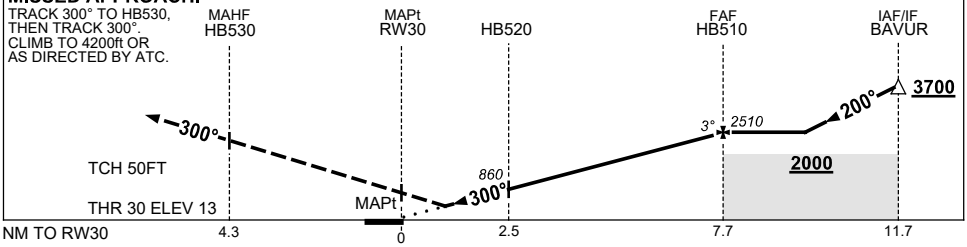

CATEGORY	A	B	C	D
RNP (0.3) (2.5% MAP)	**600** (587-3.3)			
RNP (0.3) (4.2% MAP)	**370** (357-2.0)			
CIRCLING	NOT AUTHORISED			
ALTERNATE	(1207-4.0)	(1727-4.4)	(2017-6.0)	(2087-7.0)

NOTES

1. MAX IAS: HB510 : 175KT.
2. **COLOUR**: SEE SPEC NOTICES.

Changes: CAT A ALTERNATE.

MHBGN04-183

© Airservices Australia

airservices australia