


STANDARD INSTRUMENT ARRIVAL (STAR)
MORG0 THREE ALPHA ARRIVAL (RNAV)
HOBBART, TAS (YMHB)

21 MAR 2024

ATIS 112.7 128.45	AWIS 122.375	SMC/ACD 121.7	TWR 118.1	HB APP/FIA (AH) ML CEN 125.55	CTAF+AFRU (AH) 118.1	AFRU+PAL (AH) 118.1	Bearings are Magnetic Elevations in FEET AMSL
----------------------	-----------------	------------------	--------------	----------------------------------	-------------------------	------------------------	--

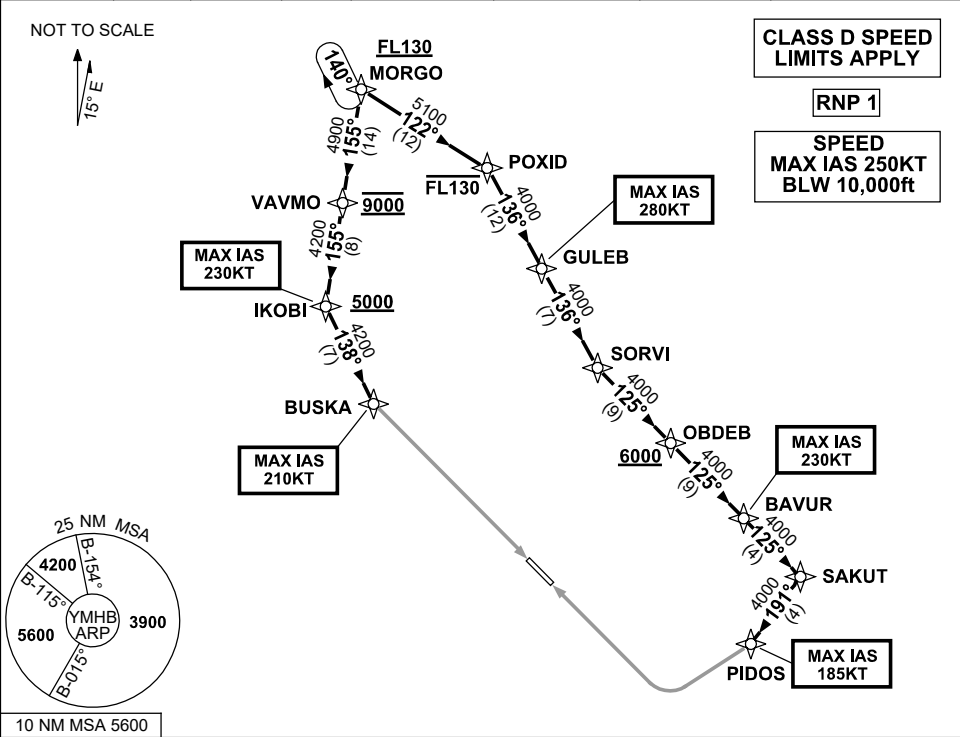

ARRIVAL: MORG0 THREE ALPHA

RWY 12:

Cross MORG0 AT or ABV FL130

- From MORG0 track 155° to VAVMO

Cross VAVMO AT 9000ft

- Track 155° to IKOBI

Cross IKOBI AT or ABV 5000ft

MAX IAS 230KT from IKOBI

- Turn LEFT, track 138° to BUSKA

MAX IAS 210KT from BUSKA

- Turn LEFT, track via
ILS-Z or LOC-Z RWY 12,
ILS-Y or LOC-Y RWY 12 or
RNP Z RWY 12

RWY 30:

Cross MORG0 AT or ABV FL130

- From MORG0 track 122° to POXID

Cross POXID AT or BLW FL130

- Turn RIGHT, track 136° to GULEB

MAX IAS 280KT from GULEB

- Track 136° to SORVI

- Turn LEFT, track 125° to OBDEB

Cross OBDEB AT or ABV 6000ft

- Track 125° to BAVUR

MAX IAS 230KT from BAVUR

- Track 125° to SAKUT

- Turn RIGHT, track 191° to PIDOS

MAX IAS 185KT from PIDOS

- Turn RIGHT, track via
RNP Z RWY 30

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: REVISED PROC, VALIDITY INDICATOR.

MHBSR04-178