

GLS RWY 16
MELBOURNE, VIC (YMML)

ATIS
114.1 118.0

APP
132.0

TWR
120.5

SMC
121.7

BELTA

MAX IAS 185KT

G16A
GLS 21940

ATC APCH SPEEDS

NM FM THR	SPEED KT
BELTA	185-160
5	160-150

Bearings are Magnetic Elevations in FEET AMSL


Holding at BELTA

TR IN TURN	TIME	MIN ALT	DME LMT
160° Left	1	4000	17

AD ELEV 434

NM TO RW16	7.9	7	6	5	4	3	2	1	0.5				
ALT (3° APCH PATH)	3000	2710	2390	2070	1760	1440	1120	800	640				

CLIMB TO 4000ft OR
AS DIRECTED BY ATC.

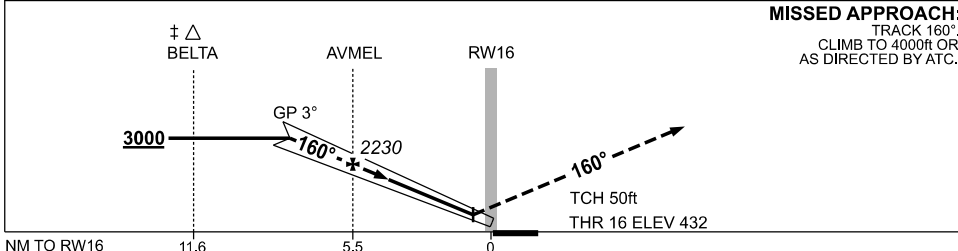

CATEGORY	A	B	C	D/D _L
S-I GLS	640 (208) 0.8 550 RVR			
CIRCLING	1140 (706-2.4)	1450 (1016-4.0)		1600 (1166-5.0)
ALTERNATE	(1206-4.4)	(1516-6.0)		(1666-7.0)

1. MAX IAS :
BELTA : 185KT.
- ‡ 2. ACFT MAY BE
RADAR VECTORED
TO FNA OR JOIN
PROCEDURE OFF
STAR PRIOR TO
FAF.

MMLGL05-186