

GLS RWY 16
MELBOURNE, VIC (YMML)

Bearings are Magnetic Elevations in FEET AMSL

TR IN TURN	TIME	MIN ALT	DME LMT
160° Left	1	4000	17

ATC APCH SPEEDS	
NM FM THR	SPEED KT
BELTA	185 -160
5	160 -150

G16A GLS 21940

RWY 16

Scale 1:500,000

25 NM MSA


4500

3700

10 NM MSA 3300

AD ELEV 434

NM TO RW16	7.9	7	6	5	4	3	2	1	0.5				
ALT (3° APCH PATH)	3000	2710	2390	2070	1760	1440	1120	800	640				

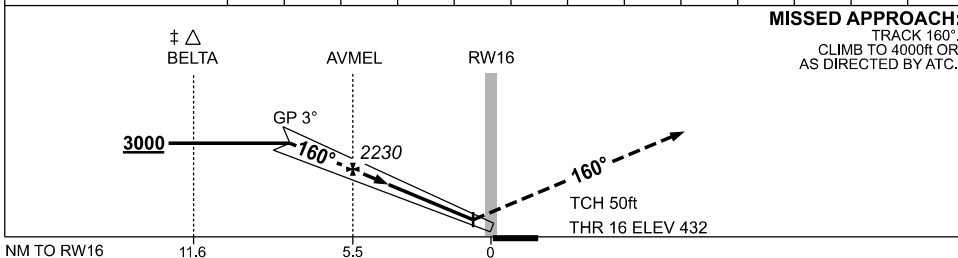

CATEGORY	A	B	C	D/D _L
S-I GLS	640 (208) 0.8 550 RVR			
CIRCLING	1140 (706-2.4)		1450 (1016-4.0)	1600 (1166-5.0)
ALTERNATE	(1206-4.4)		(1516-6.0)	(1666-7.0)

1. MAX IAS :
BELTA : 185KT.
2. ACFT MAY BE
RADAR VECTORED
TO FNA OR JOIN
PROCEDURE OFF
STAR PRIOR TO
FAF.

MMLGL05-186