

RNP RWY 34
MELBOURNE, VIC (YMML)

ATIS
114.1 118.0

APP
132.0

TWR
120.5

SMC
121.7

RNP APCH LNAV/VNAV RQMN:

- MML QNH RQ
- YMML TEMP RQ
- PROC TEMP RANGE -5°C to +60°C

ATC APCH SPEEDS

NM	FM	THR	SPEED KT
AKDEL			185 -160
5			160 -150

Scale 1:500,000

25 NM MSA

4500

B-080° **YMML ARP** **B-260°**

3700

10 NM MSA 3300

MAX IAS 185KT

Holding not available


TR IN TURN TIME MIN ALT DME LMT

AD ELEV 434

Bearings are Magnetic
Elevations in FEET AMSL

NM TO NEXT WPT	MMLSM	1	1.3	2	3	BOSGI	1	2	2.7			
ALT (3° APCH PATH)		690	780	1020	1340	1650	1970	2290	2500			

TRACK DCT TO MMLSH,
THEN TRACK 340°.
CLIMB TO 4000ft
OR AS DIRECTED BY ATC.

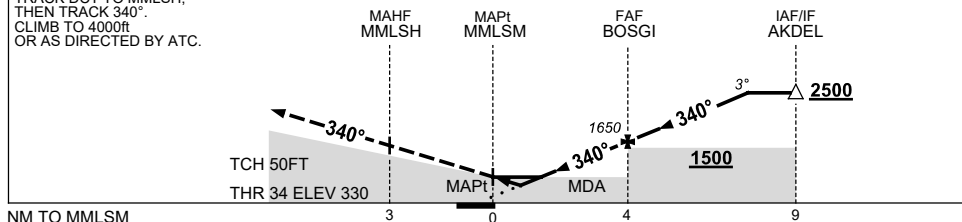

CATEGORY	A	B	C	D
LNAV/VNAV		690 (360-2.0)		
LNAV		780 (450-2.5)		
CIRCLING	1140 (706-2.4)		1450 (1016-4.0)	1600 (1166-5.0)
ALTERNATE	(1206-4.4)		(1516-6.0)	(1666-7.0)

1. MAX IAS:
AKDEL : 185KT.

MMLGN01-183