

RNP RWY 34
MELBOURNE, VIC (YMML)

ATIS 114.1 118.0

APP 132.0

TWR 120.5

SMC 121.7

RNP APCH
LNAV/VNAV RQMNTS:
 • YMMML QNH RQ
 • YMMML TEMP RQ
 • PROC TEMP RANGE
 -5°C to +60°C

Holding not available

TR IN	TURN	TIME	MIN ALT	DME LMT

ATC APCH SPEEDS

NM	FM	THR	SPEED KT
AKDEL			185 -160
5			160 -150

Scale 1:500,000

25 NM MSA

4500

B-080° **YMMML ARP** **B-260°**

3700


10 NM MSA 3300

AD ELEV 434

Bearings are Magnetic
 Elevations in FEET AMSL

NM TO NEXT WPT	RW34	1	1.3	2	3	BOSGI	1	2	2.7			
ALT (3° APCH PATH)		690	780	1020	1340	1650	1970	2290	2500			

TRACK DCT TO ML2SH,
THEN TRACK 340°.
CLIMB TO 4000ft
OR AS DIRECTED BY ATC.

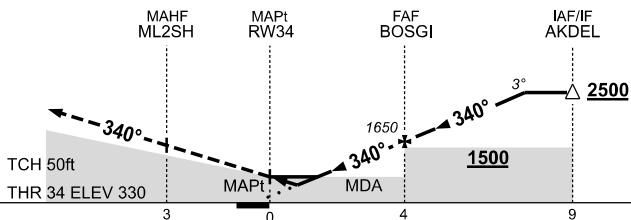

NOTES

CATEGORY	A	B	C	D
LNAV/VNAV		690 (360-2.0)		
LNAV		780 (450-2.5)		
CIRCLING	1140 (706-2.4)		1450 (1016-4.0)	1600 (1166-5.0)
ALTERNATE	(1206-4.4)		(1516-6.0)	(1666-7.0)

1. MAX IAS:
AKDEL : 185KT.

MMLGN01-188