

RNP RWY 27
MELBOURNE, VIC (YMML)

ATIS
114.1 118.0

APP
132.0

TWR
120.5

SMC
121.7

RNP APCH
LNAV/VNAV RQmnts:
• YMML QNH RQ
• YMML TEMP RQ
• PROC TEMP RANGE
-5°C to +60°C

Holding as directed by ATC

TR IN	TURN	TIME	MIN ALT	DME LMT

ATC APCH SPEEDS


NM FM THR	SPEED KT
VISAS	185-160
5	160-150

AD ELEV 434
Bearings are Magnetic
Elevations in FEET AMSL

NM TO NEXT WPT	MMLEM	1.4	1.5	2	3	MMLEF	1	2	2.6			
ALT (3° APCH PATH)		900	950	1090	1410	1660	1980	2300	2500			

MISSED APPROACH:

TRACK DCT TO MMLEH,
THEN TRACK 263°.
CLIMB TO 4000ft OR
AS DIRECTED BY ATC.

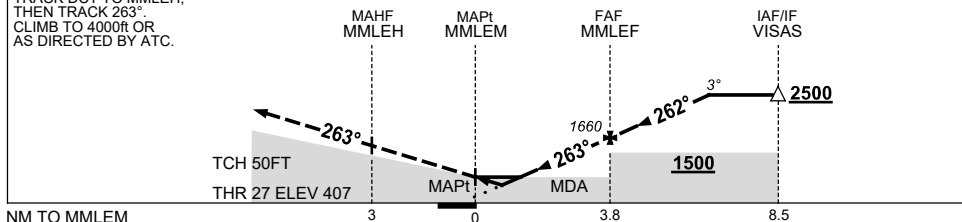

CATEGORY	A	B	C	D
LNAV/VNAV		900 (493-2.1)		
LNAV		950 (543-2.4)		
CIRCLING	1140 (706-2.4)		1450 (1016-4.0)	1600 (1166-5.0)
ALTERNATE	(1206-4.4)		(1516-6.0)	(1666-7.0)

1. MAX IAS:
VISAS : 185KT.

MMLGN04-183