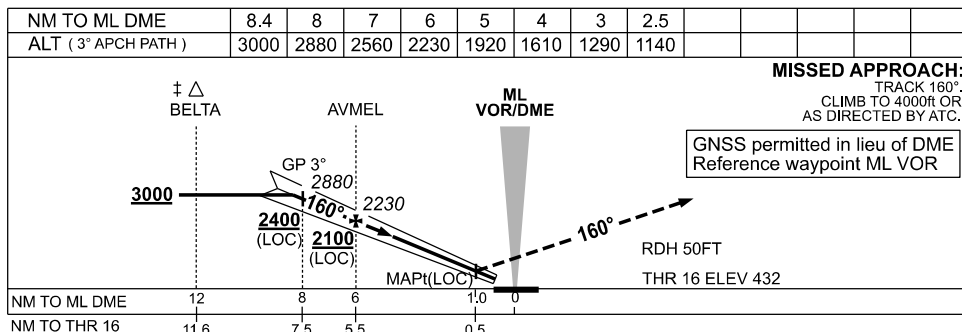
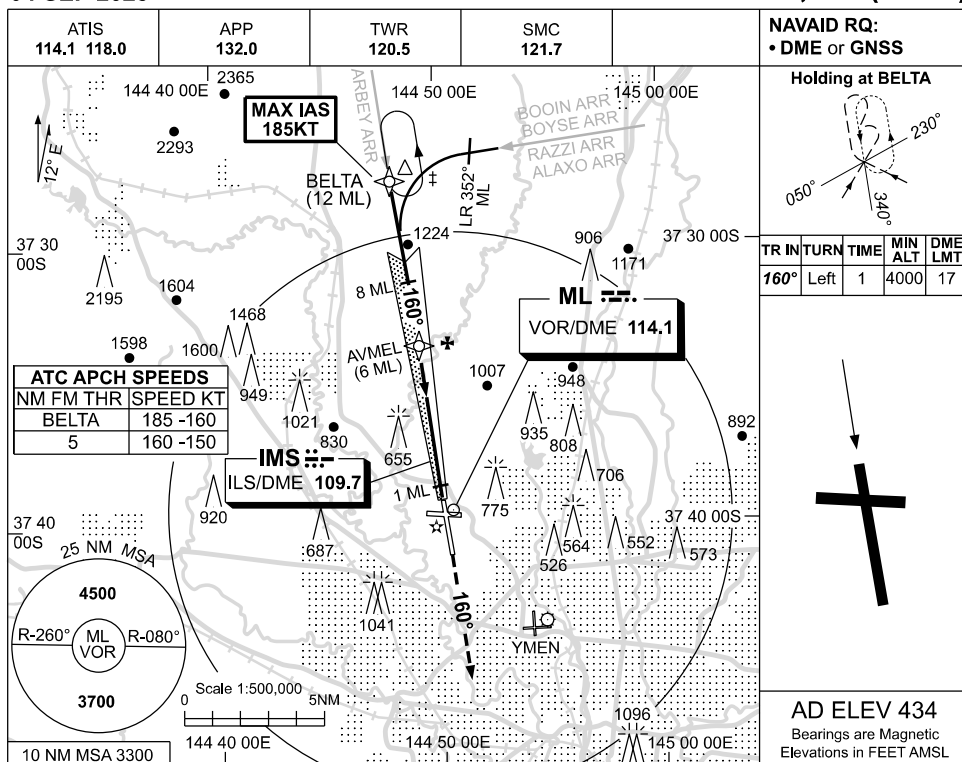


USE QNH

ILS-Y or LOC-Y RWY 16
MELBOURNE, VIC (YMML)**04 SEP 2025**

CATEGORY	A	B	C	D/D _L
S-I ILS	640 (208) 0.8 550 RVR			
S-I LOC	1140 (706-3.1)			
CIRCLING	1140 (706-2.4)	1450 (1016-4.0)	1600 (1166-5.0)	
ALTERNATE *	(1206-4.4)	(1516-6.0)	(1666-7.0)	

1. MAX IAS :
BELTA : 185KT.
- * 2. SPECIAL ALT MNM
700/2.5 KM. (NOT APP-
LICABLE TO LOC/DME).
- * 3. ACFT MAY BE
RADAR VECTORED
TO FNA OR JOIN
PROCEDURE OFF
STAR PRIOR TO FAF.

Changes: FAF ALTITUDE.

MMLII01-184