

ILS-Z or LOC-Z RWY 27
MELBOURNE, VIC (YMML)

ATIS
114.1 118.0

APP
132.0

TWR
120.5

SMC
121.7

ML VOR 114.1

IMW ILS/DME 109.3

MAX IAS 185KT

ATC APCH SPEEDS

NM	FM	THR	SPEED KT
VISAS			185-160
5			160-150

Scale 1:500,000
0 5NM

TR/INTURN/TIME/ALT/LMT


TR	INTURN	TIME	ALT	LMT
263°	Left	1	3000	14

AD ELEV 434
Bearings are Magnetic
Elevations in FEET AMSL

NM TO IMW DME	1.5	2	3	4	5	6	6.6						
ALT (3° APCH PATH)	880	1040	1360	1670	1990	2310	2500						

MISSED APPROACH:

CLIMB TO 4000ft OR
AS DIRECTED BY ATC.

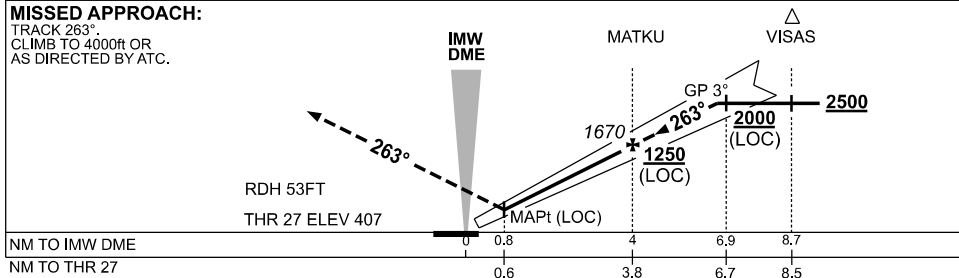

NOTES

CATEGORY	A	B	C	D/D _L
S-I ILS		610 (203) 0.8	550 RVR	
S-I LOC		880 (473-1.9)		
CIRCLING	1140 (706-2.4)		1450 (1016-4.0)	1600 (1166-5.0)
ALTERNATE *	(1206-4.4)		(1516-6.0)	(1666-7.0)

1. MAX IAS :
VISAS : 185KT.
2. SPECIAL ALTN MNM
700/2.5 KM.

Changes: FAF ALTITUDE. FAF WPT NAME.

MMLII02-184