

ATIS
114.1 118.0

APP
132.0

TWR
120.5

SMC
121.7

MAX IAS
185KT

ATC APCH SPEEDS

	NM FM THR SPEED KT
BELTA	185 -160
5	160 -150


TR TURN TIME MIN ALT DME LMT

TR	TURN	TIME	MIN ALT	DME LMT
160°	Left	1	4000	17

AD ELEV 434

Bearings are Magnetic
Elevations in FEET AMSL

NM TO IMS DME	8.1	7.7	7	5.7	5	4	3	2	1				
ALT (3° APCH PATH)	3000	2880	2650	2230	2010	1690	1370	1050	740				

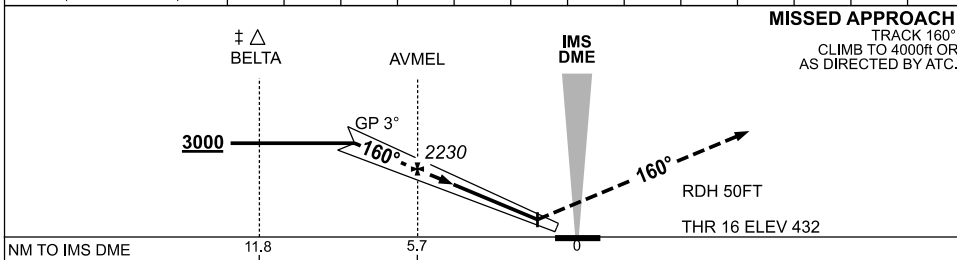

MISSED APPROACH
TRACK 160°
CLIMB TO 4000ft OR
AS DIRECTED BY ATC.

NM TO IMS DME	11.8	5.7	0
NM TO THR 16	11.6	5.5	

NOTES

1. MAX IAS :
BELTA : 185KT.
2. SPECIAL AIRCREW &
ACFT CERTIFICATION
REQUIRED.
3. SPECIAL ALT MNM
700/2.5KM.
4. ACFT MAY BE RADAR
VECTORED TO JOIN
PROCEDURE FM
STAR PRIOR TO FAP.

CATEGORY	A	B	C	D/DL
S-I ILS CAT IIIb	75 RVR			
S-I ILS CAT II	RA93 DA 532 (100) 300 RVR			
ALTERNATE **	(1206-4.4)	(1516-6.0)	(1666-7.0)	

MMLII04-184