

ATIS
114.1 118.0

APP
132.0

TWR
120.5

SMC
121.7

NAV AID RQ:
• DME

MAX IAS
185KT

BELTA
(11.8 IMS)

ATC APCH SPEEDS

NM	FM	THR	SPEED KT
BELTA			185 -160
5			160 -150

IMS
ILS/DME 109.7

AVMEL
(5.7 IMS)


Holding at BELTA

TR IN TURN	TIME	MIN ALT	DME LMT
160° Left	1	4000	17

AD ELEV 434

Bearings are Magnetic
Elevations in FEET AMSL

NM TO IMS DME	8.1	7.7	7	5.7	5	4	3	2	1				
ALT (3° APCH PATH)	3000	2880	2650	2230	2010	1690	1370	1050	740				

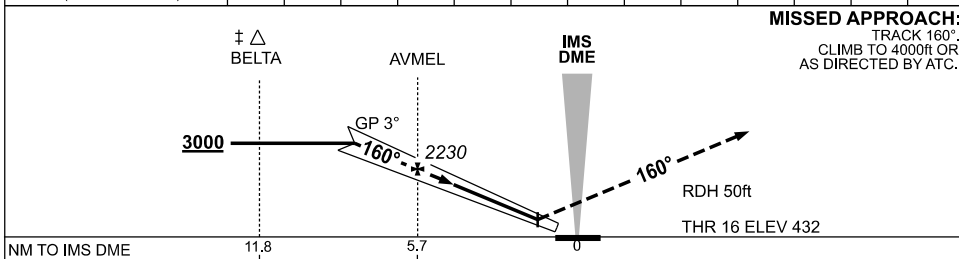

1. MAX IAS :
BELTA : 185KT.
2. SPECIAL AIRCREW &
ACFT CERTIFICATION
REQUIRED.
3. SPECIAL ALT MNM
700/2.5KM.
4. ACFT MAY BE RADAR
VECTORED TO JOIN
PROCEDURE FM
STAR PRIOR TO FAP.

CATEGORY	A	B	C	D/D _L
S-I ILS CAT IIIb			75 RVR	
S-I ILS CAT II		RA93 DA 532 (100)	300 RVR	
ALTERNATE **	(1206-4.4)		(1516-6.0)	(1666-7.0)

MMLII04-186