

ATIS
114.1 118.0

APP
132.0

TWR
120.5

SMC
121.7

MAX IAS
185KT

BELTA
(11.8 IMS)

AVMEL
(5.7 IMS)

IMS
ILS/DME 109.7

ATC APCH SPEEDS

NM	FM	THR	SPEED KT
BELTA			185 - 160
5			160 - 150

Holding at BELTA


TR IN TURN	TIME	MIN ALT	DME LMT
160° Left	1	4000	17

NAVAID RQ:
• DME

AD ELEV 434

Bearings are Magnetic
Elevations in FEET AMSL

NM TO IMS DME	8.1	7.7	7	5.7	5	4	3	2	1				
ALT (3° APCH PATH)	3000	2880	2650	2230	2010	1690	1370	1050	740				

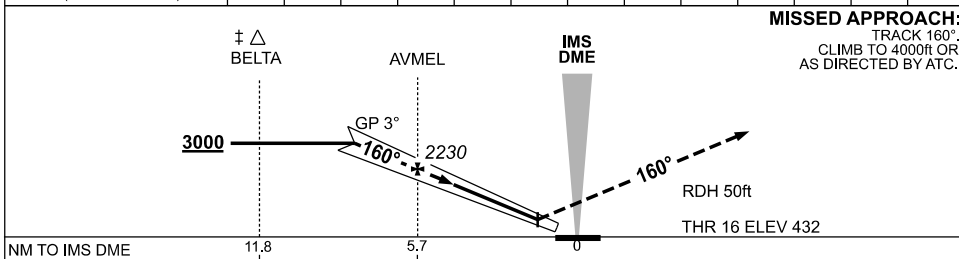

CATEGORY	A	B	C	D/D _L
S-I ILS CAT IIIb			75 RVR	
S-I ILS CAT II		RA93 DA 532 (100)	300 RVR	
ALTERNATE **	(1206-4.4)		(1516-6.0)	(1666-7.0)

1. MAX IAS : BELTA : 185KT.
2. SPECIAL AIRCREW & ACFT CERTIFICATION REQUIRED.
- * 3. SPECIAL ALT MNM 700/2.5KM
- ‡ 4. ACFT MAY BE RADAR VECTORED TO JOIN PROCEDURE FM STAR PRIOR TO FAP.

MMLII04-186