

VOR RWY 34
MELBOURNE, VIC (YMML)

ATIS 114.1 118.0 APP 132.0 TWR 120.5 SMC 121.7

NAVAID RQ: • DME

Holding as advised by ATC

TR IN	TURN	TIME	MIN ALT	DME LMT

VOR/ODME


ATC APCH SPEEDS

NM	FM	THR	SPEED KT
NUDVA	185	160	
	5	160	150

AD ELEV 434

Bearings are Magnetic
Elevations in FEET AMSL

DIST TO ML DME	9.7	9	8	7	6.5	6	5	4	3	2.7			
ALT (3° APCH PATH)	2990	2770	2450	2130	1970	1810	1490	1180	860	760			

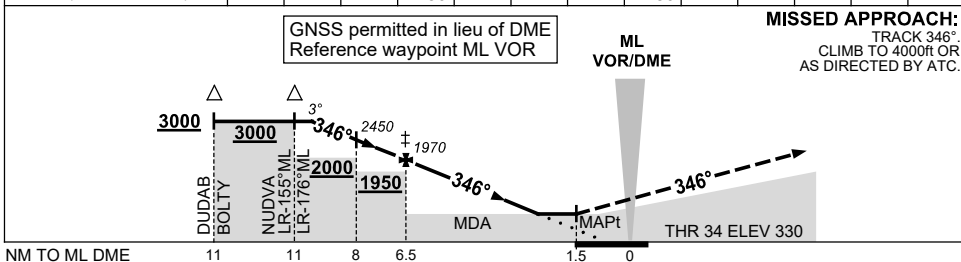

CATEGORY	A	B	C	D
S-I VOR/DME	760 (430-2.4)			
CIRCLING	1140 (706-2.4)		1450(1016-4.0)	1600(1166-5.0)
ALTERNATE *	(1206-4.4)		(1516-6.0)	(1666-7.0)

1. MAX IAS :
NUDVA : 185KT.
- * 2. SPECIAL ALT MNM
700/2.5KM.
- ‡ 3. ACFT MAY BE
RADAR VECTORED
TO IAF.

MMLVO03-183