

VOR RWY 23
NEWMAN, WA (YNWN)

AWIS 135.05 FIA ML CEN 123.4 CTAF+AFRU 122.0 AFRU+PAL 122.0

23 20 00S 119 40 00E 119 50 00E 23 30 00S 120 00 00E

3461 2493 2450 2404 2165 2602 1968

8 NWN 3500 10 NWN 230° 4 NWN 062° 073° CAT A&E CAT C&D 8 NWN

NWN VOR/DME 117.2

25 NM MSA 4600 R-030° R-240° NWN VOR 3800

10 NM MSA 3900

0 Scale 1:500,000 5NM

NAVAID RQ: • DME

Holding at NWN VOR

TR IN	TURN	TIME	MIN ALT	DME LMT
073°	Left	1	3800	


AD ELEV 1724

Bearings are Magnetic

Elevations in FEET AMSL

DIST TO NWN DME	2.2	3	4	5	6	7	7.1							
ALT (3° APCH PATH)	2260	2510	2830	3150	3470	3790	3800							

TRACK 230°. CLIMB TO 3800FT.

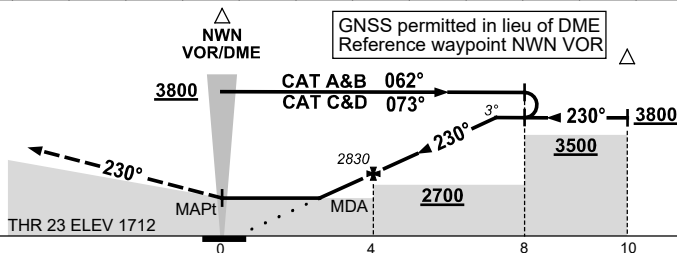

NM TO NWN DME

CATEGORY	A	B	C	D
S-I VOR/DME	2260 (548-3.1)			
CIRCLING	2500 (776-2.4)		2730 (1006-4.0)	2860 (1136-5.0)
ALTERNATE	(1276-4.4)		(1506-6.0)	(1636-7.0)

1. MAX IAS:
INITIAL : 210KT.

NWNVO02-170