

VOR RWY 12
ADELAIDE, SA (YPAD)

ATIS
116.4 134.5

APP
118.2 124.2

TWR
120.5

SMC
121.7

AD ELEV 20
Bearings are Magnetic
Elevations in FEET AMSL

AD 116.4
VOR/DME 116.4

ATC APCH SPEEDS

NM	FM THR	SPEED KT
10		185-160
5		160-150

NAVAID RQ:
• DME

Holding at AD R-304° / 10 DME

TR IN	TURN	TIME	MIN ALT	DME LMT
124°	Left	1	3000	

AD ELEV 20
Bearings are Magnetic
Elevations in FEET AMSL

AD 116.4
VOR/DME 116.4


AD ELEV 20
Bearings are Magnetic
Elevations in FEET AMSL

AD ELEV 20
Bearings are Magnetic
Elevations in FEET AMSL

DIST TO AD DME	9.6	9	8	7	6	5	4	3	2	1.6	1.5		
ALT (3° APCH PATH)	3000	2830	2510	2190	1870	1550	1230	910	600	470	450		

GNSS permitted in lieu of DME
Reference waypoint AD VOR

MISSED APPROACH:
TURN RIGHT, TRACK ON
R-140°. CLIMB TO 3800ft
OR AS DIRECTED BY ATC.

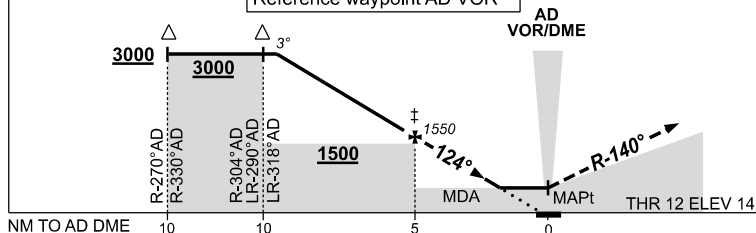

- * 1. NO CIRCLING S OF RWY 05/23 BEYOND 4 DME AD OR BEYOND 3NM FM THR 05/23/30.
- * 2. SPECIAL ALTN MNM 850/4.0KM.
- ‡ 3. ACFT MAY BE RADAR VECTORED TO FNA.
- 4. **COLOUR:** SEE SPEC NOTICES.

CATEGORY	A	B	C	D
S-I VOR/DME	450 (430-2.4)			470 (450-2.5)
CIRCLING *	900 (880-2.4)		1000 (980-4.0)	1000 (980-5.0)
ALTERNATE **	(1380-4.4)		(1480-6.0)	(1480-7.0)

PADVO03-186