

VOR RWY 23
ADELAIDE, SA (YPAD)

ATIS
116.4 134.5

APP
118.2 124.2

TWR
120.5

SMC
121.7

NAVAID RQ:
• DME

Holding at EMPUP (15AD)

TR IN TURN	TIME	MIN ALT	DME LMT
227° Left	1	3500	20

AD ELEV 20
Bearings are Magnetic
Elevations in FEET AMSL

ATC APCH SPEEDS

NM	FM	THR	SPEED KT
10			185-160
5			160-150

AD VOR
1900 3800 2700 149

25 NM MSA

10 NM MSA 3800

Scale 1:500,000
0 5 NM

8°E

AD 116.4
VOR/DME

EMPUP (15 AD)

ADelaide Parafield

538 493 591 422 1365 901 2779

34 50 00S 138 40 00E 138 50 00E 35 00 00S 138 30 00E

227° 227° 227° 227°


LR-055°AD 34 50 00S 3500 R-075°AD

4 DME AD 3NM THR 05/23/50 *NO CIRCLING

DIST TO AD DME	2.5	3	3.5	4	5	6	7	8	9	10	11	12	12.4
ALT (3.08° APCH PATH)	580	730	900	1060	1390	1710	2040	2370	2690	3020	3350	3670	3800

AT AD VOR TRACK 227°. CLIMB TO 3000ft OR AS DIRECTED BY ATC.

GNSS permitted in lieu of DME
Reference waypoint AD VOR

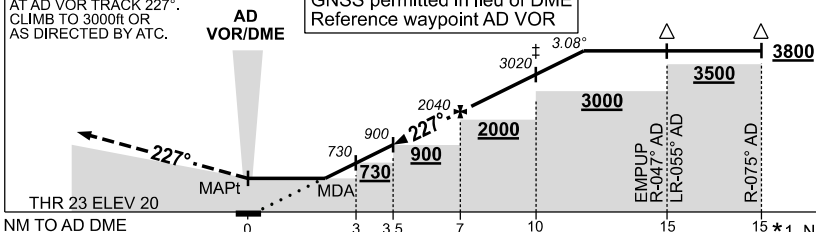

- * 1. NO CIRCLING S OF RWY 05/23 BEYOND 4 DME AD OR BEYOND 3NM FM THR 05/23/30.
- * 2. SPECIAL ALTN MNM 850/4.0KM.
- ‡ 3. ACFT MAY BE RADAR VECTORED TO 10 DME FINAL.
- 4. APCH PATH ANGLE DOES NOT COINCIDE WITH PAPI ON GLIDE SLOPE INDICATION.
- 5. **COLOUR:** SEE SPECUR NOTICES.

CATEGORY	A	B	C	D
S-I VOR/DME	580 (560-2.3)			
CIRCLING *	900 (880-2.4)	1000 (980-4.0)		1000 (980-5.0)
ALTERNATE *	(1380-4.4)	(1480-6.0)		(1480-7.0)

PADVO04-186