03 SEP 2026

PERTH/JANDAKOT, WA (YPJT)

ATIS (AWIS AH)	APP (PH)	TWR (CTAF+AFRU AH)	DEP (PH)	SMC	FIA	PAL+AA (AH)
128.65 281	123.6 132.95	118.1	118.7	124.3	PH CEN 135.25	123.9

Bearings are Magnetic
Elevations in FEET AMSL

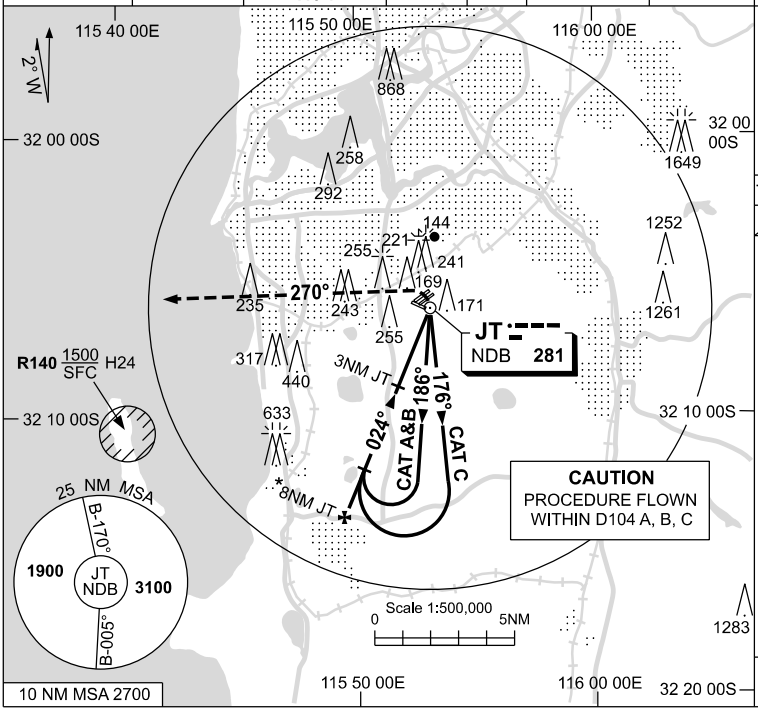

Holding as directed by ATC

TR IN	TURN	TIME	MIN ALT	DME LMT

⊙ NDB

AD ELEV 99

DME DIST				NOT APPLICABLE							
ALT											

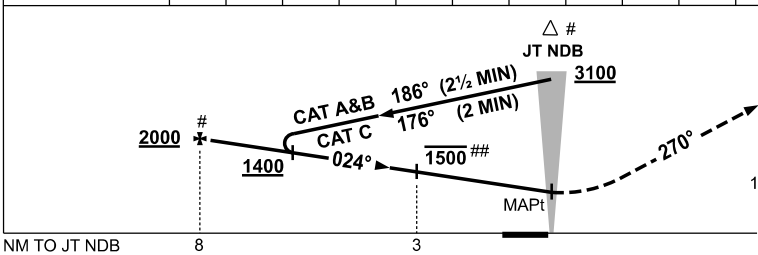

MISSED APPROACH:
TURN LEFT,
TRACK 270°.
CLIMB TO 2000ft.

NOTES

1. MAX IAS:
HOLDING: 180KT.
INITIAL:
CAT A&B 140KT.
CAT C 180KT.

* 2. ACFT MAY BE RADAR VECTORED TO FAF BY RAS.

\# 3. ACFT TO CONTACT JT TOWER BEFORE DESCENT BELOW 2000ft WHEN CTR ACTIVATED.

\## 4. ACFT ARE TO REACH 1500ft OR BELOW AS SOON AS PRACTICABLE WHEN ESTABLISHED INBOUND.

CATEGORY	A	B	C	D
				NOT APPLICABLE
CIRCLING #	**800** (701-2.4)		**890** (791-4.0)	
ALTERNATE	(1201-4.4)		(1291-6.0)	

Changes: CAT C CIRCLING AND ALTERNATE MINIMA.

PJTNB02-188

© Airservices Australia

airservices australia