STANDARD INSTRUMENT ARRIVAL (STAR)
JANDAKOT FOUR WHISKEY ARRIVAL (RNAV)

03 SEP 2026

PERTH/JANDAKOT, WA (YPJT)

ATIS (AWIS AH)	SMC	TWR (CTAF+AFRU AH)	FIA	APP (PH)	DEP (PH)	PAL+AA (AH)	Bearings are Magnetic Elevations in FEET AMSL
128.65 281	124.3	118.1	PH CEN 135.25	123.6 132.95	118.7	123.9	

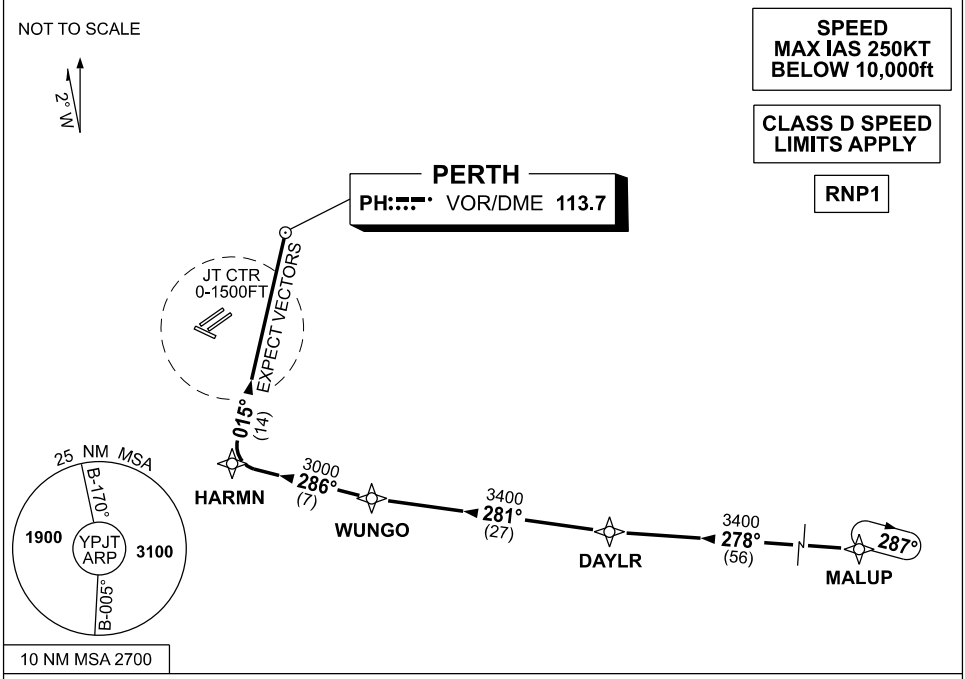

TRANSITIONS:

MALUP:
(NON-JET)

From MALUP track 278° to DAYLR
- Turn RIGHT track 281° to WUNGO
  Then follow ARRIVAL instructions

JANDAKOT FOUR WHISKEY ARRIVAL

From WUNGO turn RIGHT
- Track 286° to HARMN
- Turn RIGHT track 015° to PH VOR
- Expect radar vectors to YPJT

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600
- Comply with vertical navigation requirements and maintain minimum safe altitude.
- IF UNDER PILOT NAVIGATION track via the STAR clearance to Jandakot NDB, then in accordance with ERSA, EMERG.
- IF UNDER RADAR VECTOR, maintain vector for 2 minutes, then track to the Jandakot NDB, then in accordance with ERSA, EMERG.

Changes: TRACK BEARINGS, VALIDITY INDICATOR.

PJTSR01-188

© Airservices Australia

airservices australia