AWIS	ATIS (TWR HR)	TWR	SMC	FIA (AH)	CTAF+AFRU (AH) AFRU+PAL (AH)	Bearings are Magnetic Elevations in FEET AMSL
135.85	134.55	127.35	123.55	ML CEN 122.4	127.35	



10 NM MSA 2000

DME USING KA DME
REFERENCE WAYPOINT KA VOR



AD ELEV 33

GUGRA TO KA

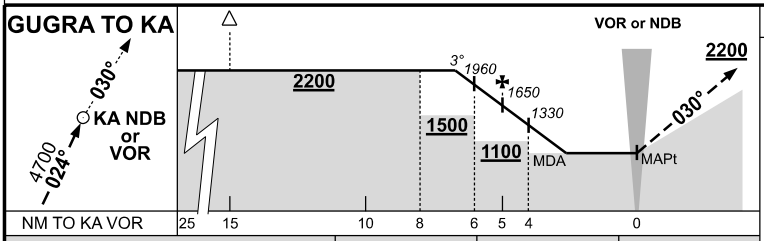

MISSED APPROACH:
TURN RIGHT,
TRACK 030°,
CLIMB TO 2200ft.

CIRCLING MINIMA	A,B: 900-2.4	C: 1090-4.0	D: N/A

NM TO KA VOR	6.7	6	5	4	3.3	3	2.7								
ALT (3° APCH PATH)	2200	1960	1650	1330	1090	1010	900								

Changes: WATIR (H24) CHANGE TO AWIS.

© Airservices Australia

airservices australia