

RNP RWY 24
PERTH, WA (YPPH)

ATIS
113.7 123.8

APP
123.6 132.95

TWR
127.4

SMC
E of RWY 03/21 122.2
W of RWY 03/21 121.7

ATC APCH SPEEDS

NM	FM	THR	SPEED KT
5			185 - 160
			160 - 150

Holding as directed by ATC

TR	IN	TURN	TIME	MIN ALT	DME LMT

AD ELEV 67
Bearings are Magnetic
Elevations in FEET AMSL

Scale 1:500,000

0 5NM

25 NM MSA 3000

10 NM MSA 2700


YPPH ARP

JANDAKOT CTR
YJPT 1500 SEC

NO CIRCLING

NM TO NEXT WPT	RW24	1	1.4	2	3	3.5	4	PH2EF	1	2	2.5	
ALT (3° APCH PATH)		430	560	740	1060	1220	1380	1700	2020	2340	2500	

MISSED APPROACH:
TRACK DCT TO PH2EH,
THEN TRACK 240°.
CLIMB TO 3000ft OR
AS DIRECTED BY ATC.

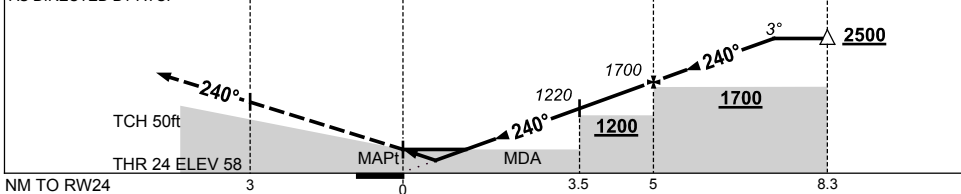

CATEGORY	A	B	C	D
LNAV/VNAV		430 (372-1.2)		
LNAV		560 (502-1.9)		
CIRCLING *	760 (693-2.4)		1440 (1373-4.0)	1440 (1373-5.0)
ALTERNATE	(1193-4.4)		(1873-6.0)	(1873-7.0)

1. MAX IAS:
KOORI : 185KT.
- *2. NO CIRCLING CAT C&D
ACFT BEYOND 4NM
PH E OF RWY 03/21
AND 06/24.
3. **COLOUR:** SEE
SPEC NOTICES

PPHGN04-183