
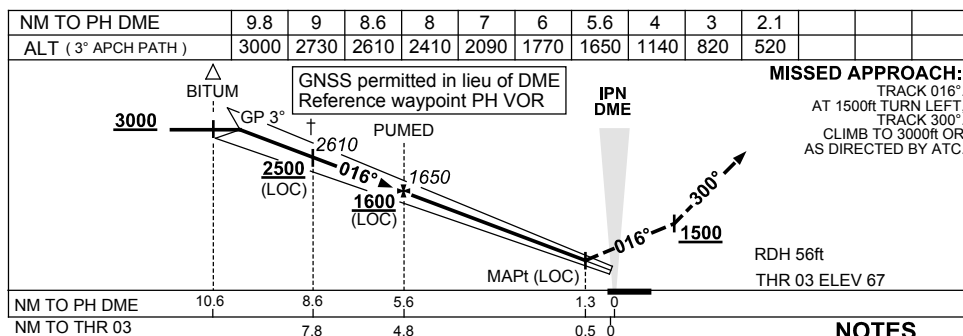


USE QNH

ILS-Y or LOC-Y RWY 03

12 JUN 2025

PERTH, WA (YPPH)

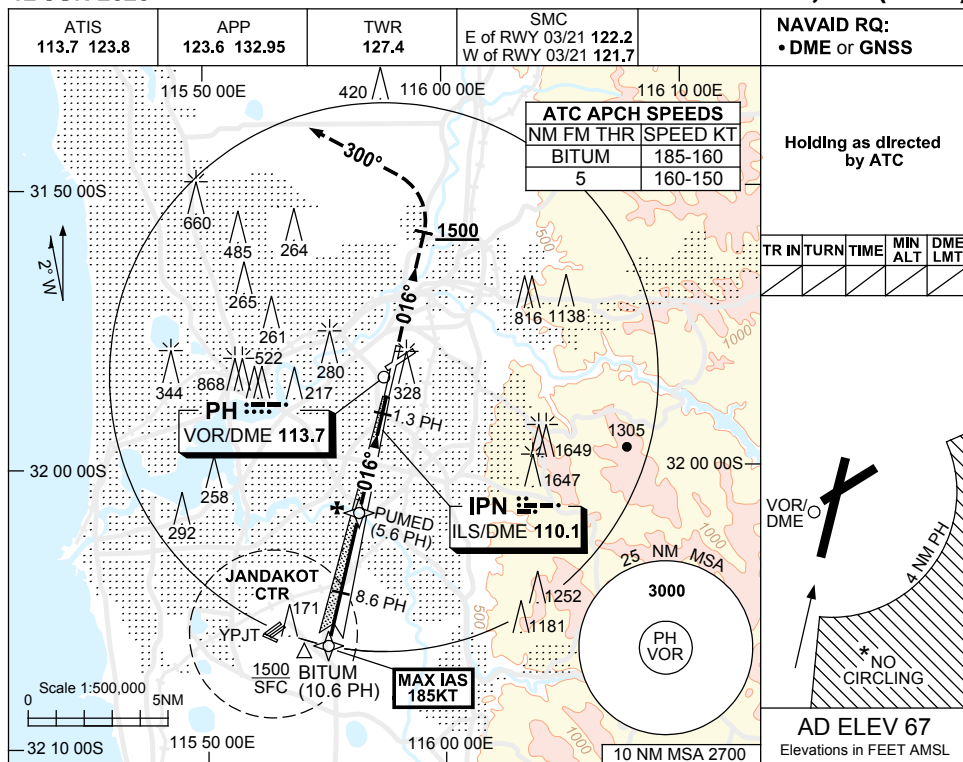

| CATEGORY    | A             | B | C               | D/D <sub>L</sub> |
|-------------|---------------|---|-----------------|------------------|
| S-I ILS     | 270 (203) 0.8 |   | 550 RVR         |                  |
| S-I LOC     | 520 (453-1.7) |   |                 |                  |
| CIRCLING *  | 760 (693-2.4) |   | 1440 (1373-4.0) | 1440 (1373-5.0)  |
| ALTERNATE ‡ | (1193-4.4)    |   | (1873-6.0)      | (1873-7.0)       |

- NOTES**
- MAX IAS:  
BITUM : 185KT.
  - NO CIRCLING CAT C&D  
ACFT BEYOND 4NM  
PH E OF RWY 03 / 21  
AND 06 / 24.
  - ACFT MAY BE RADAR  
VECTORED TO FNA.
  - SPECIAL ALTN MNM  
700/2.5KM.
  - COLOUR: SEE  
SPEC NOTICES.

Changes: YPJT ABN DCMSD, Editorial.

PPII04-183