ATIS	APP	TWR	SMC		Bearings are Magnetic
113.7 123.8	**123.6**	**127.4**	E of RWY 03/21 **122.2** W of RWY 03/21 **121.7**		Elevations in FEET AMSL

NOT TO SCALE

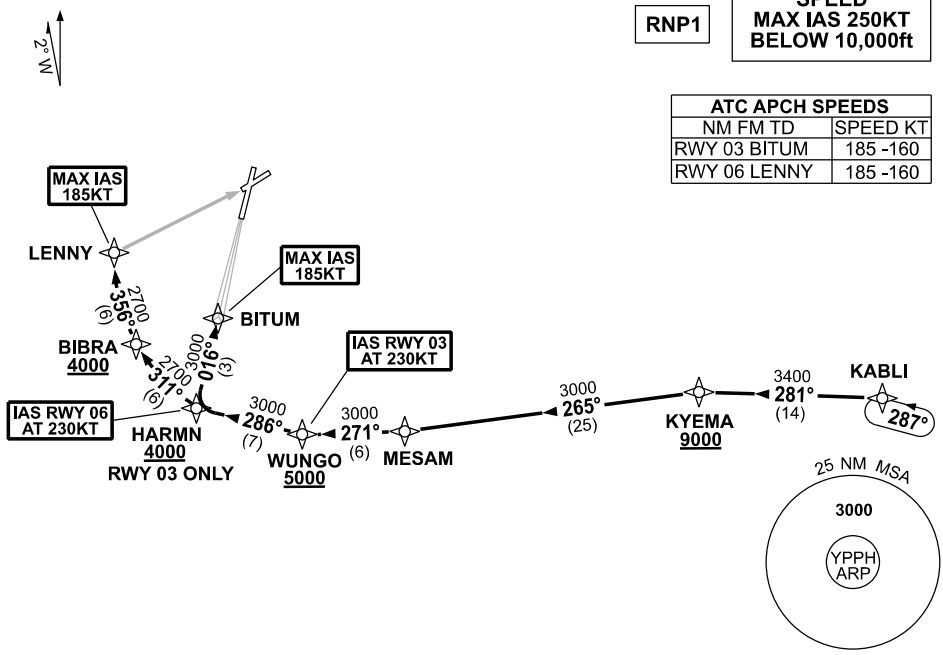

ATC APCH SPEEDS	
NM FM TD	SPEED KT
RWY 03 BITUM	185 -160
RWY 06 LENNY	185 -160

KABLI THREE ALPHA ARRIVALS

RWY 03:

- From KABLI track 281° to KYEMA
  Cross KYEMA AT or ABV 9000ft
- Turn LEFT track 265° to MESAM
- Turn RIGHT track 271° to WUNGO
  Cross WUNGO AT or ABV 5000ft
  IAS AT 230KT from WUNGO
- Turn RIGHT track 286° to HARMN
  Cross HARMN AT or ABV 4000ft
- Turn RIGHT track 016° to BITUM
  for ILS, RNP Z or
  LOC RWY 03 APPROACH
  MAX IAS 185KT from BITUM

RWY 06:

- From KABLI track 281° to KYEMA
  Cross KYEMA AT or ABV 9000ft
- Turn LEFT track 265° to MESAM
- Turn RIGHT track 271° to WUNGO
  Cross WUNGO AT or ABV 5000ft
- Turn RIGHT track 286° to HARMN
  IAS AT 230KT from HARMN
- Turn RIGHT track 311° to BIBRA
  Cross BIBRA AT or ABV 4000ft
- Turn RIGHT track 356° to LENNY
  for RNP or
  VOR RWY 06 APPROACH
  MAX IAS 185KT from LENNY

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: FROM SUP H09/26.

© Airservices Australia