ATIS	APP	TWR	SMC		Bearings are Magnetic
113.7 123.8	123.6	127.4	E of RWY 03/21 **122.2** W of RWY 03/21 **121.7**		Elevations in FEET AMSL

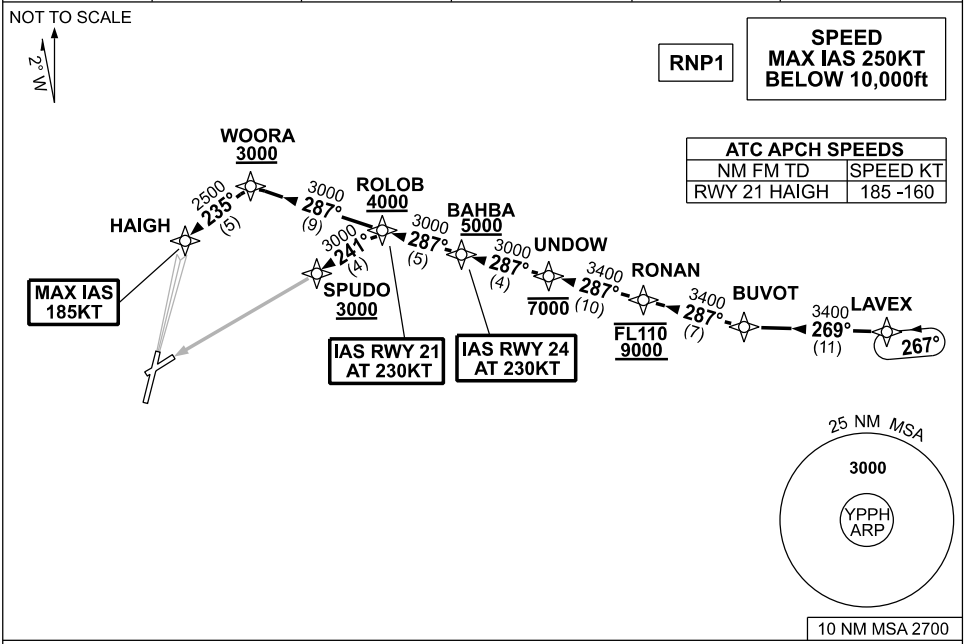

LAVEX THREE ALPHA ARRIVALS

RWY 21:

- From LAVEX track 269° to BUVOT
- Turn RIGHT track 287° to RONAN
  Cross RONAN BTN 9000ft and FL110
- Track 287° to UNDOW
  Cross UNDOW AT or BLW 7000ft
- Track 287° to BAHBA
  Cross BAHBA AT or ABV 5000ft
- Track 287° to ROLOB
  Cross ROLOB AT or ABV 4000ft
  IAS AT 230KT from ROLOB
- Track 287° to WOORA
  Cross WOORA AT or ABV 3000ft
- Turn LEFT, track 235° to HAIGH
  for ILS, RNP or
  LOC RWY 21 APPROACH
  MAX IAS 185KT from HAIGH

RWY 24:

- From LAVEX track 269° to BUVOT
- Turn RIGHT track 287° to RONAN
  Cross RONAN BTN 9000ft and FL110
- Track 287° to UNDOW
  Cross UNDOW AT or BLW 7000ft
- Track 287° to BAHBA
  Cross BAHBA AT or ABV 5000ft
  IAS AT 230KT from BAHBA
- Track 287° to ROLOB
  Cross ROLOB AT or ABV 4000ft
- Turn LEFT track 241° to SPUDO
  for RNP RWY 24 APPROACH
  Cross SPUDO AT or ABV 3000ft

COMMUNICATIONS FAILURE: PROCEDURE IN IMC

- Squawk 7600, comply with vertical navigation requirements, but not below MSA.
- Track via the latest STAR clearance to the nominated runway, then fly the most suitable approach in accordance with ERSA EMERG Section 1.5.

Changes: FROM SUP H09/26.

© Airservices Australia