

VOR RWY 24
PERTH, WA (YPPH)

ATIS
113.7 123.8

APP
123.6 132.95

TWR
127.4

SMC
E of RWY 03/21 122.2
W of RWY 03/21 121.7

NAVAID RQ:
• DME

Holding at PH R-056°/10

TR IN TURN TIME MIN ALT DME LMT
236° Left 1 2800 15

AD ELEV 67
Bearings are Magnetic
Elevations in FEET AMSL

PH VOR/DME 113.7

ATC APCH SPEEDS

NM	FM	THR	SPEED KT
10	185	160	
5	160	150	

Scale 1:500,000

5NM

25 NM MSA
3000

10NM MSA 2700

JANDAKOT CTR
YPJT
1500 SFC

NO CIRCLING


AD ELEV 67
Bearings are Magnetic
Elevations in FEET AMSL

NM TO PH DME	2.7	3	4	5	6	7	8	9	9.5				
ALT(3.1°APCH PATH)	560	670	1000	1330	1660	1990	2320	2650	2800				

MISSED APPROACH:

TRACK 236°. CLIMB TO 3000ft OR AS DIRECTED BY ATC.

GNSS permitted in lieu of DME
Reference waypoint PH VOR

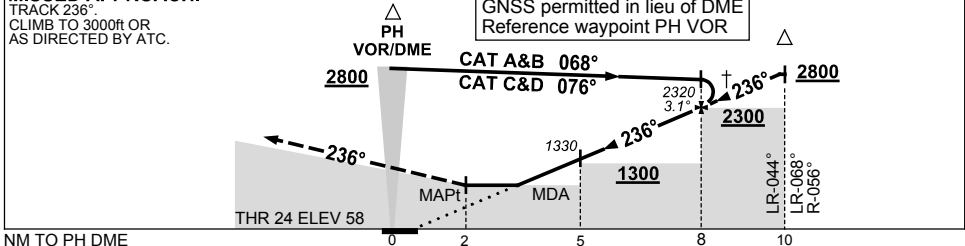

NOTES

CATEGORY	A	B	C	D
S-I VOR/DME	560 (502-1.9)			
CIRCLING *	760 (693-2.4)		1440(1373-4.0)	1440(1373-5.0)
ALTERNATE **	(1193-4.4)		(1873-6.0)	(1873-7.0)

Changes: YPJT ABN DCMSD, Editorial.

* 1. NO CIRCLING CAT C&D
ACFT BEYOND 4NM
PH E OF RWY 03/21
AND 06/24.

†2. ACFT MAY BE RADAR
VECTORED TO FNA.

* 3. SPECIAL ALTN MNM
* NOT APPLICABLE.

4. COLOUR: SEE SPEC NOTICES.

PPHVO04-183