

STANDARD INSTRUMENT DEPARTURES (SID) CANBERRA THREE DEPARTURE (RADAR) - RWY 12, 17 & 35 CANBERRA, ACT (YSCB)


26 NOV 2026

ATIS 116.7 127.45 263	AWIS (AH) 116.7	SMC/ACD 121.7	TWR 118.7	DEP TRACKS EAST TRACKS WEST	124.5 125.9	FIA (AH) ML CEN 125.9	CTAF+AFRU (AH) AFRU+PAL (AH) 118.7	BRG are MAG ELEV in FT AMSL
--------------------------	--------------------	------------------	--------------	-----------------------------------	----------------	--------------------------	--	--------------------------------


NOT TO SCALE



**SPEED
MAX IAS 250KT
BELOW 10,000ft**



10 NM MSA 5100

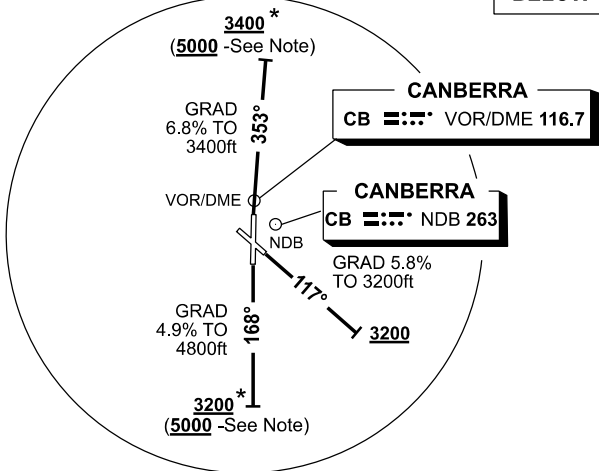

GNSS permitted in lieu of DME
Reference waypoint CB VOR

NOTE *

NOT BELOW 5000ft
OUTSIDE TOWER
HOURS-NAP REF

CANBERRA THREE DEPARTURE (RADAR)

RWY 12

- GRAD 5.8% to 3200ft then 3.3%
- Track 117°
- AT 3200ft turn to assigned heading or track

RWY 17

- GRAD 4.9% to 4800ft then 3.3%
- Track 168°
- AT 3200ft (5000ft-See NOTE *) turn to assigned heading or track

RWY 35

- GRAD 6.8% to 3400ft then 3.3%
- NOT BEFORE DER turn RIGHT track 353°
- AT 3400ft (5000ft-See NOTE *) turn to assigned heading

COMMUNICATIONS FAILURE PROCEDURE

On recognition of communication failure

- Squawk 7600.
- Maintain last assigned vector for two minutes and, if necessary, climb to minimum safe altitude to maintain terrain clearance, then
- Proceed in accordance with the latest ATC route clearance acknowledged.

Changes: FROM SUP H86/26.

SCBDP01-189