USE QNH

NDB-A

27 NOV 2025

CANBERRA, ACT (YSCB)

ATIS	AWIS (AH)	APP	TWR	SMC/ACD	FIA (AH)	CTAF+AFRU (AH) AFRU+PAL (AH)	Bearings are Magnetic Elevations in FEET AMSL
116.7 127.45 263	116.7	124.5	118.7	121.7	ML CEN 125.9	118.7	

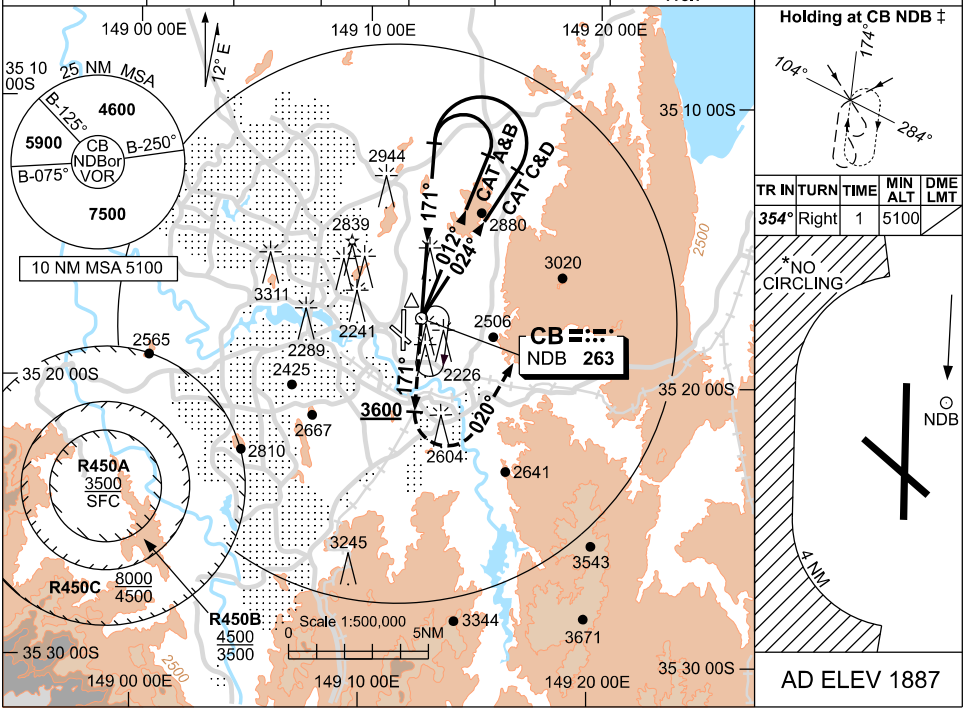

DME DIST				NOT APPLICABLE								
ALT												

MISSED APPROACH:
TRACK 171°.
AT 3600ft TURN LEFT,
TRACK 020°.
CONTINUE CLIMB TO 5100ft.
OR AS DIRECTED BY ATC.

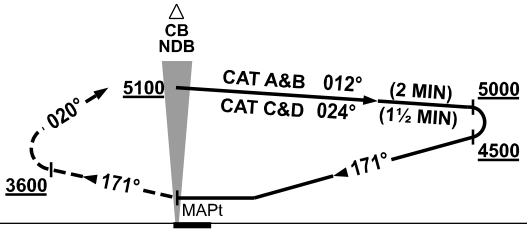

NOTES

‡ 1. MAX IAS :
INITIAL : 185KT.
HOLDING: 185KT.

* 2. NO CIRCLING BEYOND 4NM WEST OF RWY 17 / 35.

3. SEPARATION FM R450C NOT ASSURED WHEN HOLDING ABV MNM ALT.

4. **COLOUR**: SEE SPEC NOTICES.

CATEGORY	A	B	C	D
CIRCLING *	**3350** (1463-2.4)		**3580** (1693-4.0)	**3720** (1833-5.0)
ALTERNATE	(1963-4.4)		(2193-6.0)	(2333-7.0)

Changes: R450.

SCBNB01-185

© Airservices Australia

airservices australia